Agentic Institutions: Mandates, Capabilities, Constraints, and Escalation for Machine Economic Actors

Nikola Stojanow

October 17, 2026 (v1.10.1, tag v1.10.1)

Abstract

Delegated cognition, one persistent model dispatching drafting to others, is becoming common in agent systems, yet the institutions governing it remain ad hoc. This paper contributes a conditional cost model for delegation, an accounting of context admission, and an instrumented self-study of one institution with its incident record. It does not establish a general institutional design. For free workers the model says delegation wins whenever the single-attempt acceptance probability exceeds a threshold set by the cost of a failed attempt, about 0.02 at one wave's artifact size under unbounded retry (0.09 at a retry cap of three), under a proviso that the dispatcher return little of the draft to the hub. For paid workers the condition is the rent-or-buy breakeven with a horizon, stated under a persistence assumption the paper's own hub violates. Per unit of context budget, delegation admits up to $1/\alpha$ artifacts per inline artifact, approached only as the brief and print-back terms vanish. A pre-registered wave with admission logged on both arms found α at 0.165 pooled against the attested 0.137 and acceptance 6 of 6 under a reading of the acceptance rule fixed after the drafts were read (1 of 6 under the rule as written), and found the dispatcher returning each whole draft to the hub, so the measured multiplier was 0.57 against a predicted 2.0 to 3.7 and the corollary's own proviso failed: the saving the paper prices exists only when the whole draft does not persist in hub context. The record, including a worker that wrote outside its brief, a fabricated example that passed six review passes, and five hub-side incidents, is public with its instrument, data and reviewer reports. No single check was sufficient, and what held was a reproducible record and independent recomputation from it.

1. Introduction

1.1 Machine money

Money is moving between machines. Agent wallets hold balances. The x402 protocol [7] enables per-request payment. Google's A2A protocol [2] standardises how agentic services discover and transact with one another. The infrastructure layer for machine economic actors is in production now.

A fundamental question remains unanswered: who is accountable when an agent acts? Not who built it or who deployed it, but who authorised it, under what constraints, and what happens when it fails.

1.2 The gap

The protocols being standardised address communication, identity, and payment. They do not address authority. An agent may know how to send a message, authenticate itself, and receive payment. It does not know whether it was authorised to initiate the action, what budget it was allocated, or where to escalate when it meets a boundary it was not designed for.

This is the distinction between orchestration and institution. Orchestration coordinates tasks. An institution coordinates authority. It defines what an actor is permitted to do, what capabilities it has demonstrated, what constraints bind it, and what happens when it reaches the edge of its mandate. Human institutions developed these structures because coordination problems at scale demand them, and the formal study of institutions

for software agents is a quarter of a century old [31]. The same problems arise when LLM agents organise at scale with real money attached.

1.3 The move

We propose treating agent organisations as institutions. A mandate replaces the job description. A capability registry replaces the résumé. Constraints replace the policy manual. An escalation path replaces the management chain. A post-hoc provenance audit replaces the auditor. Each layer has an economic reading in the cost model of Part 3. The mandate bounds the delegation. The registry enables routing. The constraints make acceptance measurable and enforce budgets. Escalation handles the case the brief did not anticipate. The audit catches what the constraints cannot see.

The anatomy is consistent with the cost model, in the sense that each layer sets one of the variables the model prices. It is not derived from it. §3.5 says exactly what that consistency amounts to.

The contribution is narrower than the anatomy. It is (i) the delegation condition with its horizon term, stated under a named assumption and instantiated where the record allows (the horizon term changes a decision only at worker prices above $p(1 - \alpha)$ times the hub's, the adversarial grid of §3.3, and the free-lane corollary is what the record speaks to); (ii) the accounting of context admission, which prices the hub's admission policy rather than delegation as such; and (iii) the instrumented self-study, with its instrument, incident record, and the agent panel's reviewer reports public. The anatomy is a framing the cost model is consistent with. Several of its layers have counterparts in electronic institutions [31] and in the agent-governance work of §2, and the paper does not establish a general institutional design.

1.4 The evidence

We operate a live hub-and-worker institution: one orchestrating model manages free-tier worker models that draft artifacts and return results. The economics are measurable. In the novelty-audit wave, the one wave whose produced-byte count reproduces exactly from the dispatch instrument, the instrument logged 50,567 transcript bytes at zero marginal cost (about 11 % of which is the CLI's echo of the two briefs, if that wave's script version echoed as the retained one does, Table 1 note) and the hub admitted about 7,000 characters, a hub-audited figure with no instrument record, into its context. Across the four drafting waves the hub-audited admitted fraction ranged from 0.09 to 0.19 (Table 1, §3.1).

Part 3 states the delegation condition and measures or estimates its terms. Three things follow from it. For free workers, delegation wins whenever p exceeds a small threshold p^* set by the cost of a failed attempt (§3.3). For paid workers, delegation wins if the session outlives a breakeven horizon, under the assumption that inline output persists in context for the session. Our hub's own store compacts, so the result the record supports is the free-lane one. The pre-registered wave of §3.8 then found that result's proviso failing on the paper's own dispatcher, which returns the whole draft to the hub; what the wave found consistent with the record is α, not the saving. Per unit of context budget, delegation admits up to $1/\alpha$ artifacts per inline artifact, between 5.3 and 11.1 on hub-audited α, an illustrative range on an α with no instrument record, not a measured performance figure.

The paper also records what the institution got wrong. A worker wrote outside its mandate and signed a variant of its acceptance needle, which the instrument recorded as a completion (INC-001). A worker-generated worked example with no instrument record passed its needle and two rounds of agent review (INC-004). The hub itself destroyed two sections of its own manuscript (INC-002), shipped a stale figure (INC-003), reported a count the hub could not tie to a published query (INC-005), and anchored its turn-count query at the INC-001 row's append time without primary verification (INC-006). Every one of these is in Appendix B and in the public incident log, and the controls that caught them are named in §4.4 and §4.6.

Part 2 surveys related work. Part 3 presents the cost model and measurements. Part 4 presents the institutional anatomy with maturity labels. Part 5 describes the method by which the institution studied itself, including what its agent reviewers missed. Part 6 states conjectures for agentic market design.

2. Related Work

2.1 Agent-interoperability protocols

The current stack splits interoperability into two layers. MCP [1] standardises the boundary between a model and its tools: a server exposes capabilities and any compliant client can call them. A2A [2] sits a layer up and standardises agent-to-agent communication: agent cards for discovery, task and message exchange, and capability negotiation across heterogeneous agents. ANP [3] pushes toward a transport-level federated agent network with routing and identity. Together these remove hand-built point-to-point integration. Gap: they standardise how agents talk, discover, and call tools, but are silent on why an agent may act, what authority it holds, what it is forbidden to do, and who answers if it violates a boundary.

2.2 On-chain agent identity and reputation

ERC-8004 [4] provides an on-chain primitive for AI agents: tokenised, verifiable identity whose outputs and provenance are attestable on Ethereum. Adjacent standards extend the identity surface. ERC-4337 [5] account abstraction enables smart-contract wallets operated autonomously by agents, ERC-5192 [6] soulbound tokens give non-transferable reputation anchors, and ENS gives a readable name. NostrAgent [28] proposes a decentralised identity and delegation architecture off-chain. The result is a plausible substrate for machine identities with persistent, globally auditable history. Gap: these give agents identity, provenance, delegation keys, and reputation markers, but nothing encodes a mandate's scope, a capability set, an accountability chain, or escalation rules. Identity without governance.

2.3 Agent simulation platforms

Simulation work established that agent societies exhibit institution-like structure. Generative Agents [8] showed about 25 LLM agents forming schedules, relationships, and social memory. Concordia [9] generalised this into a reusable simulation library. OASIS [10] scaled to a social-media platform run by LLM agents with no hard-coded rules, where norms and trends emerged from interaction. Gap: simulated agents act on synthetic stakes inside a sandbox. Nothing enforces institutions on agents holding real economic value, and no mechanism makes institutions resilient to adversarial or mandate-seeking machine actors.

2.4 Agent memory architectures

MemGPT [11] treats context as an operating system's memory hierarchy, paging between a working window and archival storage. Zep's Graphiti [12] builds a bi-temporal knowledge graph of entities and relations over time. Both give agents durable state beyond a single context window. Gap: memory is descriptive, not normative. Nothing in a knowledge graph confers decision authority, records an agent's commitments, or establishes accountability for what it did with its state.

2.5 Multi-agent frameworks

AutoGen [13], CrewAI, and LangGraph [14] wire model calls into workflows (handoffs, tool loops, graph topologies, role assignments) and manage execution. Orchestration is a prescriptive control flow: one process decides which agent runs when, and cooperative behaviour is assumed. Institutions govern relationships among self-interested actors with competing incentives, define authority and constraints, adjudicate disputes, and hold parties accountable. A graph edge says ”call agent B”. An institution says ”agent B may not exceed its mandate, and here is the escalation path if it tries.” Gap: frameworks optimise pipelines under a benign coordinator and provide no mechanism for authority or accountability among agents that do not share the coordinator's objective.

2.6 Machine payments

ERC-4337 smart-account wallets let agents hold funds and authorise transactions [5], and x402 [7] generalises HTTP request-response into pay-per-call micropayments. On-chain settlement executes without a human in the loop. Sun et al. [30] survey this infrastructure across the agent task lifecycle and find that security and

economic guarantees most often fail where verification meets payment settlement, which is the same seam this paper conjectures to be the binding constraint. What remains aspirational is the governance layer around the money: who sets a machine's spending authority, how constraints are enforced, and what happens on violation. Gap: payment rails let agents transact, and AP2 [35] binds one action class, a purchase, to a user-signed mandate with a verifier-signed receipt, which is the mandate layer of §4.2 for that class. Nothing yet makes an agent accountable for misallocation across actions.

2.7 Economics and governance of delegation

The nearest neighbours to the cost model are in a separate literature. Anchan and Sen [15] formalise the same inline-versus-delegate trade-off as an attention tax against a handoff tax, with human-subject validation. Our condition is the machine-institution analogue. Theirs prices attention per step, ours amortises it over a session's remaining turns under an explicit persistence assumption (§3.3). Theirs assumes a human attention market, ours a free-lane worker supply. The two should be read together. Hill [16] describes evaluation abundance at organisational scale without a mechanism. Our conjecture in §3.5 is a mechanism-level complement: hub admission αS against a hard context budget K. Kolt [17] and Johnson and Naimi [18] treat governance-by-design for AI agents. Principal-Agent RL [19] treats delegated control. Sreenivas and Larson [20] treat contract structure for LLM delegation. Jensen and Meckling [21] remain the classical anchor, and the premise that monitoring, not production, is the rationed factor in a firm is theirs and Alchian and Demsetz's [33], with Coase [32] behind both. Our first-pass model brackets the moral-hazard channel (p is exogenous. There is no effort choice). The incidents in §4.4 are the empirical evidence that the channel is real.

In the routing literature, FrugalGPT [23] and RouteLLM [24] optimise per-query price among paid tiers. The difference between their condition and ours is one term, the remaining-turns horizon (1+T), and §3.6 shows that term disappears for any hub that can evict its own inline output. Under eviction, at zero overhead, our condition reduces to theirs (§3.6). The cost condition itself has the form of the rent-or-buy breakeven of Karlin et al. [34]. What is ours is the horizon term under a stated assumption and the instantiation. Static-context executor architectures [25] extend one agent's window. The per-context-budget multiplier for an institution is unclaimed there.

Formal institutions for software agents predate LLMs. Esteva et al. [31] specify electronic institutions (roles, scenes, norms) for agent societies, and that programme and its successors already bind authority, constraints, and sanctions over agents. The gap this paper names is narrower than ”no prior institutional structure”: it is the absence of such a structure over machine economic actors with live payment rails and LLM workers, grounded in a cost model instantiated in an instrumented run.

3. The Economics of Delegated Cognition

3.1 Setup and measurements

One orchestrating model (the hub) holds the mandate and the context. Free-tier worker models execute briefs. All quantities below are taken from the drafting sessions of 7–9 October 2026, not simulated; the instrument-logged ones are marked as such. The instrument table, its dispatch script, and every other artifact cited here are public (§5).

Table 1. Delegation waves. ”Produced” is bytes of worker output as logged by the dispatch instrument (`wc -c` over the worker transcript, which includes CLI chrome and, on rows 7 to 26, the CLI's echo of the brief; §3.7). On wave 4 (rows 8 to 13) the echoed briefs are 5,364 of 40,441 bytes (13.3 %). If the earlier script version that wrote rows 1 to 6 echoed likewise, they are 4,898 of 20,692 on wave 2 (23.7 %) and 5,644 of 50,567 on wave 3 (11.2 %). The echo inflates S and so deflates α on the instrument denominator and b/S by those fractions. ”Admitted” is characters the hub retained in context after verification, a hub-audited figure with no instrument record for any wave, and it can include hub expansion of the worker text, so α is not bounded by 1 by construction. N is dispatches. α = admitted / produced on the hub-audited denominator. Wall is the longest single worker duration in the wave (parallel dispatch), from the instrument.

Wave	N	Produced (bytes)	Admitted (chars)	α	Wall (s)
1. Drafting †	2	22,824 (instr. 2,835)	3,853	0.17	43
2. Intro, citations ‡	2	23,440	4,447	0.19	109
3. Novelty audit	2	50,567	≈7,000	0.14	525
4. Six sections ‡	6	40,447	≈3,500	≈0.09	163
Total, 1–4	12	137,278	18,800	0.137	840 (Σ max)
5. Resolver (not woven)	1	19,759	n/a	n/a	234

† Wave 1 is dual-sourced. The dispatch instrument logged 1,397 bytes for the outline brief and 1,438 for the related-work brief (2,835 first-pass bytes; rows 1 and 2 of the public table). The hub-audited figure of 22,824 counts the artifact at weave time, after hub expansion. The raw worker outputs for 7 October no longer exist because the dispatcher wrote every worker's output to one shared temporary file that later dispatches overwrote (§3.7), so 22,824 cannot be reconstructed and the two figures are shown side by side rather than reconciled. The wave-1 α of 0.17 is hub-audited against the 22,824 denominator; against the instrument denominator the admitted count exceeds the first-pass output, so the ratio is not defined. On rows 1 and 2 the brief file is larger than the logged transcript (1,615 and 1,741 bytes against 1,397 and 1,438), which the earlier instrument version cannot explain and the retained one would not produce. Readers should treat wave 1 as the least reliable row.

‡ Waves 2 and 4 diverge from the instrument by smaller margins (23,440 vs 20,692 and 40,447 vs 40,441) for the same weave-time reason. Wave 3's produced count matches the instrument exactly (30,430 + 20,137). All four instrument sums reproduce from the public table. Row 5 is the citation-resolver dispatch. Its output was used for adjudication and not woven, so it has no admitted count and is excluded from the totals.

Admitted counts. No admitted count for any wave is instrument-logged. The admitted column of the instrument exists from 8 October 2026 but no row carries a value (§3.7). Waves 3 and 4 are reported to the nearest hundred because the hub did not record the exact figure. All four α values are therefore hub-audited estimates, and the results that depend on them (§3.4, Appendix A F1) are labelled as bounds.

Units. Costs are in characters of hub context, and the instrument logs bytes. For English prose the two differ by a few percent plus CLI chrome, and w/h as a per-character price ratio absorbs the difference only if numerator and denominator are measured on the same text. We say "bytes" wherever the instrument is the source.

Pricing assumptions. Assumption P1: hub input and output characters are priced uniformly at h, worker characters at w. Assumption P2: every re-read of a persisted hub character costs h. Vendors that discount cached-prefix input charge c·h for a re-read with $c < 1$; under caching the horizon term (1+T) below becomes (1+cT) and every breakeven horizon in §3.3 scales by 1/c. Whether the gateway used here applies such a discount is not established; §3.3 gives one sensitivity row.

3.2 The two cost laws

Hub attention is persistent: a character in the hub's context is re-paid as input on every remaining turn of the session. A turn here is one API invocation of the hub model. If the session has T further turns after the artifact exists:

Inline drafting (the hub writes it): $C_in = h \cdot S \cdot (1 + T)$. Write once, re-read every turn.

Delegation (workers write, hub verifies): $C_del = (w/p) \cdot S + h \cdot (\alpha S + b + o) \cdot (1 + T) + h \cdot \varepsilon \cdot (1/p - 1) \cdot (1 + T)$.

Here p is the single-attempt probability that a dispatch is accepted as delivered (in this paper never a constant of the worker: every value used is an estimated rate of acceptance on the first attempt, corrected for incidents, over a small and selected mix of briefs, at most 11/13 on the hub's record, §3.7), b is the characters of brief the hub writes, o is the characters of dispatch tool output that land in hub context, and ε is the hub characters consumed per failed attempt (failure verdict plus re-brief). The (w/p)S term is the expected worker cost under retry-until-accept (geometric attempts, mean 1/p). Everything the hub writes or reads persists under

the same law as the artifact, which is why b, o, and ε carry the (1+T) factor. The v1 instrument logged neither o nor ε; the v2 dispatcher of §3.8 logs o. b is recoverable from the committed briefs: the twelve drafting briefs in `briefs/` total 19,262 bytes against 114,535 instrument-logged output bytes, b/S = 0.17 pooled over the twelve on the instrument denominator (0.14 with rows 1–2 excluded, or with b and α both on the hub-audited denominator of Table 1), 0.09–0.38 on the ten briefs whose logged transcript exceeds the brief and above 1 on rows 1–2, with two caveats: the committed copies are post-typography-pass (bytes within 1 %), and on rows 1–2 the brief exceeds the logged transcript (1,615 vs 1,397 and 1,741 vs 1,438 bytes), which is noted beside Table 1 note †. §3.3 states what dropping the terms costs.

Lemma 1 (retry cap). If the hub caps attempts at R and drafts inline on exhaustion, with q = 1 − p, then C_del^R = (1 − q^R)·C_del + q^R·[C_in + h(b + o)(1 + T)], because the brief and dispatch output are paid once per dispatch whether or not it ends in acceptance. Hence C_del^R < C_in iff C_del + (q^R/(1 − q^R))·h(b + o)(1 + T) < C_in. The residue vanishes at b = o = 0 and is below 0.4 % of the brief term at p = 0.85 and R = 3 (but 52 % at p = 0.3, the grid's lowest row), so the condition below is the same for bounded and unbounded retry up to that residue. The lemma assumes the inline fallback costs exactly C_in and that each failed attempt leaves only ε in context. It reconciles this model with a retry cap of the kind the ladder of §4.5 specifies. The ladder's terminal rung, a human reviewer, is not priced by the model, and the residue is negligible at p = 0.85, not at the grid's lowest row.

3.3 The delegation condition

Proposition 1. Under the cost laws of §3.2 and Assumptions P1–P2, delegation has lower expected cost than inline drafting iff

```
(w/h) < (1 + T) · [ p · (1 − α − (b + o)/S ) − ε · (1 − p) / S ].        (⋆ε)
```

Proof: divide C_del < C_in by h·S·(1+T), collect terms, multiply by p(1+T).

Dropping the overhead terms (b + o)/S and ε(1−p)/S gives the simplified form used for the sensitivity grid below:

```
(w/h) < p · (1 + T) · (1 − α).        (⋆)
```

(⋆) overstates delegation's advantage by exactly the dropped terms, so every horizon derived from it is a lower bound on the true breakeven horizon. In our runs failure tails were hundreds of characters against artifacts of about 6,700 to 25,300 bytes per dispatch on Table 1's hub-audited column (wave 1's instrument-logged 1,418 per dispatch excluded), so ε(1−p)/S is below 0.02 at the record's p of 0.85 (at wave 4's size that needs p above about 0.55), and b/S = 0.17 pooled over the twelve drafting briefs (§3.2), while o was unlogged on the Table 1 waves (§3.8 logs it).

Assumption E (persistence). (⋆ε) charges inline output on every remaining turn. That requires inline output to stay in hub context for the session. §3.6 shows this hub's store compacts, which violates E, and states what survives without it. The result this paper rests on is Corollary 1 below, whose threshold does not depend on T: at w = 0 the horizon factor (1+T) multiplies both sides of (⋆ε) whenever all hub output is charged under one persistence law (§3.2), so it cancels under E and under the eviction model of §3.6 alike, provided the inline hub admits the same fraction α of its own output as of worker output, which §3.6 assumes. The wave's adjudicator admitted 0.218 of the hub model's drafts against 0.165 of the worker's, and with unequal fractions the term (α_I − α_D)(1+T) does not cancel and equals one artifact at T ≈ 18. The threshold itself moves with the law, from p* = 0.022 under E to 0.018 under eviction at the measured b (§3.6), and the claim as this paper makes it, p above about 0.02, holds under either symmetric model. The paid-worker grid that follows is a sensitivity analysis conditional on E. Under the eviction model of §3.6 the horizon advantage disappears and the condition becomes, at zero overhead, w/h < p, the per-query routing condition of [23][24].

Corollary 1 (free lane). For w = 0 and (b+o)/S < 1 − α, (⋆ε) holds iff p > p* := ε / (ε + S(1 − α − (b+o)/S)). At the magnitudes of our runs (ε ≈ 300, S ≈ 20,000, α = 0.17, o unlogged on those waves and set to zero) p* ≈ 0.018 with b set to zero and 0.022 at the measured b/S = 0.17 on the instrument denominator (0.021 at b/S = 0.14 on the hub-audited denominator), which we round to 0.02 at S ≈ 20,000; at the §3.8 wave's S_D = 7,934 the same formula gives 0.065 with the print-back reduced to its status line, and is undefined with it. Free-lane delegation therefore wins for any dispatch accepted more than about one time in fifty, and that is

the only form in which this paper claims it. That is the unbounded-retry value. At the measured b/S, Lemma 1 gives $p^* = 0.22$ at a retry cap $R = 1$ (the policy of §3.8), 0.12 at $R = 2$, 0.09 at $R = 3$ (the ladder of §4.5), 0.06 at $R = 5$, 0.04 at $R = 10$ and 0.025 at $R = 50$. At $b = 0$ it is 0.018 at every R. At the other waves' per-dispatch sizes the unbounded value is 0.04 (11,440, pooled) to 0.06 (6,741, wave 4), and 0.02 is wave 3's figure. On the logged wave of §3.8 the proviso fails, $(b+o)/S = 1.291$ against $1 - \alpha = 0.835$, so under $(\star\varepsilon)$ the free lane does not win at any p for that dispatcher; what the wave tested was the condition's premise, not its threshold, and at the realized $\hat{p} = 6/6$ the premise is the condition itself.

Proposition 1, in the form $(\star)$, is the rent-or-buy breakeven of Karlin et al. [34] with horizon 1+T: the one-time cost of delegating, (w/p)S, against the per-turn rent the hub pays to keep inline output in context, $h(1-\alpha)S$. The paper claims no novelty for the form. The classical online strategy for an unknown horizon (rent until accumulated rent equals the buy price, then buy) does not transfer directly, because switching from inline to delegated mid-session would require evicting the inline draft, which Assumption E says the hub cannot do. In the no-switch regime the two committed policies have simple bounds against the T-informed optimum: inline-always costs at most $1/\alpha$ times the optimum (about 7 at the pooled α), and delegate-always at most $\max\{1, (w/h)/p + \alpha\}$ times it. For free workers $(w/h)/p + \alpha = \alpha < 1$, so delegate-always is the optimum itself (ratio 1) with no knowledge of T required. With overhead restored its cost relative to inline is $\alpha + (b+o)/S + \varepsilon(1-p)/(pS)$, below 1 exactly when $p > p^*$ (Corollary 1, under its proviso; on the §3.8 wave the ratio is 1.456 at $p = 1$ and no p satisfies it). The hub is taken to be risk-neutral throughout: the retry-until-accept cost has unbounded support and only its expectation is compared.

Paid workers: sensitivity grid (conditional on Assumption E, which our hub violates). The ratios $w/h \in \{15, 20, 30\}$ are an adversarial range, not a realistic regime: in practice workers are cheaper than the hub, not dearer. The rows are illustrative: p is an estimated rate of acceptance on the first attempt (§3.2), not a property of the worker. Breakeven horizon T from $(\star)$ at $\alpha = 0.17$ (wave 1):

p	w/h = 15	w/h = 20	w/h = 30
0.3	$T > 59.2$ ($T \geq 60$)	$T > 79.3$ ($T \geq 80$)	$T > 119.5$ ($T \geq 120$)
0.5	$T > 35.1$ ($T \geq 36$)	$T > 47.2$ ($T \geq 48$)	$T > 71.3$ ($T \geq 72$)
0.7	$T > 24.8$ ($T \geq 25$)	$T > 33.4$ ($T \geq 34$)	$T > 50.6$ ($T \geq 51$)

Sensitivity. At the pooled $\alpha = 0.137$ every horizon falls by about 4 % ($p = 0.3$: $T > 56.9$ / 76.2 / 114.9). With the measured brief term $b/S = 0.17$ restored, every breakeven $1 + T$ rises by a factor $(1 - \alpha)/(1 - \alpha - b/S) \approx 1.25$ ($p = 0.3$: $T > 74.5$ / 99.7 / 150.1), and the largest cell, $T > 150.1$, is still cleared by the 221 distinct turns of the session below. At a cached re-read price $c = 0.1$ (Assumption P2) every horizon rises tenfold, and the $p = 0.3$, $w/h = 30$ cell becomes $T > 1{,}195$, which the session below does not clear. The mandate-compliant acceptance rate on the paper's own record is at most $11/13 \approx 0.85$ (§3.7), above every row of the grid. All of this is conditional on Assumption E.

The remaining-turns count. Working sessions in our logs are long. The hub's message store was queried for assistant rows in the hub session after the drafting wave:

```
sqlite3 state.db "SELECT COUNT(*) FROM messages
  WHERE session_id='20260725_131848_6f3bc9c8' AND role='assistant'
  AND timestamp >= strftime('%s','2026-10-07 13:18:00');"
```

The anchor string is interpreted by SQLite as UTC. The event it names is the INC-001 row, appended to the instrument at the worker's completion, 13:18:34 local time (UTC+4), 09:18 UTC. The other five section dispatches were appended at 13:16. Because every row from 7 October had been evicted by the time of the freeze, both anchors select the same set. The query returned 343 rows at the freeze, commit cd46a7e of the companion repository, authored 2026-10-09 04:16:35 +04 (00:16 UTC). The qualifying row ids and timestamps are archived in the repository as `data/t_freeze_2026-10-09T0416.csv`, SHA-256 5572cf45f6c551739a4e7ed5afabebaf45f40deae28c27b85f0eafcd55eb4258, and `scripts/verify_t.sh` recounts the archive and checks the hash. The archive is a frozen receipt that the count was taken. It is not an independently checkable measurement, because the store it was taken from is not public.

Raw rows are not turns. Of the 343 archived rows, 122 share one of four second-resolution timestamps (48, 18, 26, and 30 rows at 2026-10-08 08:46:41, 14:13:40, 15:21:55, and 17:42:43 UTC) with ids stepping by two inside each burst (two gaps of three in the last burst). No model emits 48 turns in one second. We infer that these are compaction rewrites of earlier turns. The archive carries only id and timestamp, so the inference rests on the spacing, and the store columns that would confirm it (role, active flag, finish reason) are not public. There is no timestamp shared by two, three, or four rows, so the threshold of five does no quiet work. If a future freeze's de-duplicated count fell below the largest horizon in the grid, the paid-lane sensitivity claim would be withdrawn for that session. Excluding every burst row leaves 221 distinct assistant turns, and `scripts/dedup_t.sh` reproduces that count from the archive. Both figures clear the largest horizon in the grid ($T > 119.5$). An earlier freeze on 8 October returned 277 raw rows, and a re-run on a machine without the hub's store returns 0. Because the store compacts, a turn that was evicted at turn 50 of 221 was re-paid 50 times, not 221, so even the de-duplicated count is an upper bound on the horizon term ($\star\varepsilon$) prices, not a floor.

3.4 Observation: yield per unit of context

A hub session has a context budget K, in characters. Inline, each artifact consumes S of it. Delegated, each consumes αS plus the brief, the dispatch output, and any failure residue. Writing $\Delta = \alpha S + b + o + \varepsilon(1/p - 1)$ for the per-dispatch context delta:

$$N_{in} = K/S, \quad N_{del} = K/\Delta, \quad N_{del} / N_{in} = S/\Delta \le 1/\alpha.$$

This is an identity, not a result: $1/\alpha$ is α's definition inverted. Its content is the bound. On the one wave with logged admission (§3.8) S_D/Δ_D, the identity's value at the logged terms, was 0.69, and on the inline arm's own artifact size (S_I/Δ_D, the matched multiplier pre-registered in §3.8) 0.57, both below 1, because the dispatcher's print-back put the whole draft into hub context ($o \approx S$); the bound is approached only as $(b + o)/S \to 0$. On hub-audited α the admission-only bound $1/\alpha$ is between 5.3 and 11.1 across waves (wave-rounded 0.19 and 0.09) and 7.3 pooled; these are illustrative values on an α with no instrument record, not measured performance. With the measured brief term, $S/\Delta \le 1/(\alpha + b/S) = 3.3$ pooled, with α hub-audited and b/S on the instrument denominator (3.6 with both on the hub-audited denominator), and 3.0 at the wave-1 α with the pooled brief term (3.2 on wave 1's own hub-audited denominator), and the true multiplier is below that by the o and ε terms, unlogged on the Table 1 waves and, where o was logged (§3.8), equal to S. We do not call this a lifespan multiplier: the hub session in Appendix A F3 has survived multiple compactions rather than dying when K filled, so "lifespan" would need an operational definition (turns until first forced compaction) that we have not measured. What the bound says is that per unit of context, a hub that admits a fraction α of worker output can process up to $1/\alpha$ times as many artifacts as one that drafts inline, and that the hub's admission policy, not delegation as such, is what sets α (§3.6).

3.5 Conjecture: verification binds, and the anatomy is consistent with the cost model

Jevons [22] observed that efficiency in coal use increased total coal consumption. Narayanan and Pace [26] ask whether the same rebound applies to AI labour markets. We conjecture that it governs cognition inside a single institution: as the marginal price of worker cognition falls toward zero, dispatch volume expands until the hub's context budget binds. The two-constraint sketch is: a hub choosing dispatch volume D to maximise value $V \cdot D$ faces $D \cdot \Delta \le K$ (context) and $D \cdot (w/p) \cdot S \le B$ (money). As $w \to 0$ the money constraint's shadow price goes to zero and the context constraint binds. Nothing in this paper measures D expanding or K saturating, and the cost model charges the hub nothing for verification itself beyond the admitted characters, so the paper cannot show that verification binds. This is a conjecture, labelled as such wherever it appears, and [16] leaves the organisational-scale version open.

What ($\star\varepsilon$) does support is a consistency claim. Its variables are set by identifiable institutional choices. The brief fixes S and what counts as done (mandate). The choice of worker fixes w and p (capability routing, which in the single-worker case reduces to the cascade rule of [23][24]: pick the worker minimising $w/(hp)$). The acceptance criterion fixes how p is measured and what ε costs (constraints). The retry and rewrite policy fixes ε (escalation). The post-hoc audit fixes whether a needle hit is counted as acceptance at all (provenance audit, §4.4). We call the anatomy consistent with the cost model in that sense and no stronger one. We do

not claim the layers are derived from ($\star\varepsilon$) or that they are the unique policy that satisfies it. Any design that leaves w, h, p, T, and α unchanged is equally consistent with it. The claim that machine coordination needs institutions because monitoring, not production, is the rationed factor is the premise of Alchian and Demsetz [33] and Jensen and Meckling [21]. What this paper adds is a per-character, per-turn form of that premise and a measurement of its terms.

3.6 Threats to validity

Eviction (Assumption E fails). C_in charges every inline character on every remaining turn. But the hub's message store compacts: superseded turns are evicted, which is why the T count in §3.3 is an upper bound on presence-in-context. A hub that drafts inline, writes the draft to disk, and lets the drafting turn compact pays approximately h_out·S + h·αS·(1+T), with h_out = h under P1: the same persistence term as delegation, plus one output charge. Take eviction to apply to all hub output alike (the inline draft, the brief, the dispatch output, and the failure residue). Against that baseline the paid-lane condition reduces to w/h < p − [p(b + o) + ε(1 − p)]/S, which at zero overhead is w/h < p, the per-query cascade condition of [23][24], and the (1+T) amplification in ($\star\varepsilon$) disappears. The $1/\alpha$ bound of §3.4 is then a property of admission policy, not of delegation: any hub that writes to disk and admits a fraction α of its own output obtains it. Delegation is one way to obtain $\alpha < 1$. In our runs it was the only way available, because the hub cannot evict within a turn and its own drafting output stays in context until the next compaction, which the hub does not control. But the archive in §3.3 shows that compaction did occur, so E held only between compactions. The free-lane corollary survives with its threshold changed: under eviction, free delegation wins iff p > ε/(ε + S − (b + o)), about 0.015 at our magnitudes with b = 0 (0.018 at the measured b), slightly below p* because both sides now pay the admission term. The paid-lane grid should be read as an upper bound on delegation's advantage, valid while inline output persists. Measuring how long inline output persists before compaction is the next instrument addition.

Caching (Assumption P2). See §3.1 and the sensitivity row in §3.3.

T as expected remaining turns. Session length is heavy-tailed and sessions die early, which hurts the paid-lane case because the inline alternative then looks cheaper. The committed-policy bounds in §3.3 are the hedge: for free workers above p*, delegate-always needs no estimate of T.

p. The instrument records completion, not acceptance (§3.7). The rate used in the sensitivity discussion, ≤ 11/13, is the paper's own incident-corrected figure, and briefs were self-selected and heterogeneous, so no single p describes them. Over heterogeneous briefs with per-brief acceptance p_i the expected retry cost is E[1/p_i] ≥ $1/\bar{p}$ (Jensen), so ($\star\varepsilon$) at the pooled rate understates cost and the free-lane condition is on the harmonic mean of the p_i, which is below the pooled rate and is zero if any brief is unacceptable, the case Lemma 1's cap exists for. At this record's magnitudes the harmonic mean clears p* by an order of magnitude provided the two failed briefs' own acceptance probabilities exceed about 0.04 (eleven briefs accepted outright and two at 0.05 give a harmonic mean of 0.25; two at 0.001 give 0.0065, below p*), which the record does not observe, because no retry was run.

Benign workers. All workers were cooperative free-tier models with no incentive to game the needle. The anatomy has not been exercised against an adversarial or mandate-seeking worker, which §2.3 names as the gap in prior work. Its behaviour against such a worker is uncharacterised.

ε and overhead. ε was small in our runs (failure tails of hundreds of characters) but is not logged. The brief term b is recovered from the briefs (§3.2) and o was not logged on the Table 1 waves. p* ≈ 0.02 depends on a failed attempt leaving only a verdict in context ($\varepsilon \ll \alpha$S). If each failed attempt left its admitted share, the free-lane threshold would be p > α (at zero overhead). With the heterogeneity of p above, all four enter ($\star\varepsilon$) in the direction of making delegation look better than it is. The wave of §3.8 measured o at 1.007 S, the largest of the four, 3.5 times the brief term. If the hub verifies by reading, o is at least the read: with o = rS and r the fraction read, Corollary 1's proviso becomes r < 1 − α − b/S and p* = ε/(ε + S(1 − α − b/S − r)), which rises to 1 as r approaches 0.66 at the measured terms. On the §3.8 dispatcher r was 1. The cost model prices no verification read, and §3.8 measured it as the first-order term.

Wave-1 denominator. The instrument and the hub disagree by 8× on wave 1 (Table 1, note †). Nothing in Parts 3–4 depends on wave 1 alone: the free-lane corollary needs only p > p*, the $1/\alpha$ bound is set by waves

2 and 4, and the grid is given at both the wave-1 α and the pooled α.

Admitted counts. No admitted count on the Table 1 waves is instrument-logged (§3.1); every α in Table 1 is a hub-audited estimate (the hub's own count at weave time, with no instrument record); the one instrument-logged α is §3.8's.

The free-lane corollary survives all of these. It needs $w = 0$, $(b+o)/S < 1 - \alpha$, a proviso the §3.8 wave found violated by this dispatcher's print-back, and p above a threshold of about 0.02 at $S \approx 20{,}000$ (0.065 at the §3.8 wave's artifact size with the print-back reduced to its status line).

3.7 Instrumentation

The dispatch script (`instrument/hf_dispatch.sh` in the companion repository) runs one worker under a wall-clock alarm and appends one row per attempt to an instrument table: date, worker, brief, budget, duration, output bytes, message count, verdict, and (from 8 October 2026) artifact bytes and admitted characters. The retained v1 script is established as the writer of rows 15 to 26. Rows 8 to 14 carry an empty artifact value although their briefs carry needles (row 7 is the probe, whose brief is not retained), so they were probably written before that logic was added or without the needle argument, which leaves the value empty either way; the CLI path was the same. The frozen snapshot used throughout this paper is the first 16 rows: 13 briefs and three connectivity probes.

What the verdict column records. In the lineage that wrote rows 7–26 (two versions on one CLI path, the retained one established for rows 15–26; rows 1–6 came from an earlier version not retained, and on rows 1–2 the logged transcript is smaller than the brief, so the echo mechanism below is established for rows 7–26 only), the row is written before the acceptance grep runs, and the verdict is OK if the worker process exited zero and TIMEOUT otherwise. The needle outcome is not logged. So the frozen snapshot shows 16 of 16 rows completed with exit status zero, and nothing more. The dispatcher's needle test attested nothing about the worker either: the worker CLI's single-query path echoes the full brief to standard output before the response, every brief spelled out its needle in a trailer instruction (verified: all 23 v1 dispatched briefs in the repository's `briefs/` folder end with one, as does the reconstructed v2 probe brief), and the v1 test searched the whole transcript, so on rows 7–26 the test could be satisfied by the echo alone. Needle status for the frozen rows is therefore hub-attested only. Row 13, the six-section wave's last dispatch, is the INC-001 dispatch, whose worker signed a variant of its needle rather than the specified string, whose row reads OK, and whose variant the hub accepted as a signature at the time. On the hub's attestation, 12 of 13 briefs emitted their specified needle.

What acceptance means. A needle hit is not acceptance. Two briefs in the frozen set were counted as accepted at the time and were not: INC-001 (a scope violation under a variant needle) and INC-004 (fabricated content under a correct needle). The mandate-compliant first-try rate on the paper's own record is therefore at most $11/13 \approx 0.85$, and that is the p the sensitivity discussion in §3.3 uses. We print no confidence interval on the exit-zero rate. It is a calibration signal on a self-selected brief mix, not an acceptance measurement, and an interval on it would dress an attestation as a statistic. The pre-registered wave of §3.8 logs acceptance per row; an interval, if any, belongs there.

Instrument versions. Rows 1–6 carry minute-resolution timestamps and rows 7–26 second-resolution, so rows 1–6 were written by an earlier version of the script that is not in the repository. Worker outputs are named by needle rather than by brief filename, and the section briefs' filenames do not track their section labels. `briefs/README.md` maps every instrument row to its brief, section, needle, and output file, and should be used instead of the filenames. Timestamps are host-local (UTC+4) without a zone marker. The `admitted_s` column was added on 8 October and is read from an environment variable at dispatch time, before any adjudication exists, so it is empty in every row. The raw worker output was written to one shared temporary path that each dispatch overwrote, which is why no raw 7 October worker output survives (Table 1, note †; the `sections/` archives are the hub's post-cleaning copies). Each of these is addressed in the v2 script that accompanies this revision:

- The worker is invoked on the CLI's quiet path, which prints the final response alone to standard output (no brief echo, no box chrome, no exit summary) and the session id to standard error, so there is nothing to cut.

- Line endings are normalised before the gate, because the CLI's interactive path writes carriage returns when its output is a file and a hand-written fixture had missed that.
- The row is written after the gate with a four-valued verdict (OK, NEEDLE-MISS, TIMEOUT, ERROR) and the numeric exit code.
- The needle is required as the last non-empty line of the response and its position logged.
- Timestamps are UTC.
- Per-dispatch output and error files are retained (for every row but the removed first attempt, below).
- The append is serialised with a portable lock and a row that cannot take the lock is kept in a pending file rather than lost.
- And the brief bytes (b) and the bytes the dispatcher returns into hub context (o) are logged.

The quiet path does not report a message count, so v2 rows carry none, and o counts the dispatcher's printed summary, which can exceed the raw response (512 against 449 bytes on the one live row). v2 still enforces scope by instruction, not by the dispatcher. v2 has been tested against fixtures generated with the same print call the quiet path uses, including a carriage-return case, and was exercised against a live worker on 14 October 2026 once as a public row: a probe brief dispatched to DeepSeek returned in 9 s with a two-line response ending in the needle, verdict OK, session id captured (row 1 of `instrument/hf_stats_v2.tsv`, raw output retained). Its first attempt had failed before any worker ran, because the script passed the brief to the wrong CLI switch, and that error row was removed as a script measurement rather than a worker one. Two further live dispatches on 14 October, the third referee's two review passes (`reviews/r10a_numbers_audit.md` and `r10b_referee_report.md`, each headed "Dispatched via hf_dispatch.sh"), ran through the dispatcher and have no row in either public table. No number in this paper comes from the v2 table. The 26 historical rows are left as they are, the first 16 under the prefix hash recorded in the number snapshot and, from v1.10, the full 26-row file under a SHA-256 recorded beside it.

Live instrument. The public table holds 26 rows as of 9 October 2026: 24 exit-zero completions and two TIMEOUT verdicts, both on the same round-4 reviewer brief, which exceeded its wall-clock budget twice (17,507 and 21,035 bytes of transcript captured. The v1 artifact column recorded 10,497 and 14,302 bytes after the last occurrence of the needle string, which on those rows was the CLI's echo of the brief). Those are budget exhaustions, not acceptance failures, and the second was a manual hub re-dispatch, not the ladder of §4.5. The second attempt's review was taken from a file the worker had written and was used in round 4. The round-4 brief (`briefs/review4_C.md`) permitted exactly that one file write and forbade every other, so the write was within mandate. The two probe re-dispatches on 8 October (rows 15 and 16) were connectivity checks, not retries. Over all 26 rows the exit-zero rate is 24/26.

Duration at the frozen snapshot ranged 7–525 s with median 29 s over 16 rows (the earlier n = 14 snapshot's median was 31.5 s). Message counts ranged 2–70, because research sweeps make heavy internal tool use.

Caveats. n is small and briefs were self-selected. This is an accumulating instrument, not a result. The traffic asymmetries quoted in Appendix A F3 come from the hub's private message store and use different denominator windows (hub lifetime since 25 July 2026 versus worker artifacts from the 7 October measurement day), so they are not reproducible from the repository and the artifact-only ratio of 185× is cited only as a frozen value.

3.8 The pre-registered wave, as run

Nothing in this paper's record could falsify its free-lane threshold, and until this wave nothing in it could test the characterisation of α, the multiplier bound, the brief-term range or the representativeness of 11/13, because every α was hub-audited and every acceptance hub-attested. The companion repository carries, at tag v1.8.3 and amended at v1.8.4 before any dispatch, a protocol for one wave with those quantities instrument-logged (`experiments/ab-2026-10/PROTOCOL.md`; the amendment, a brief-length change made after a synthetic dry run showed the original 400-to-700-word target would put b/S near 0.5 by construction, so that P4's PASS is partly a design outcome, and the withdrawal of a prediction on o/S that the record gave no basis for, is in the file with both versions in the history). GitHub's push events, which carry GitHub's clock, record the push of the v1.8.3 commit (245d4d8) at 18:22:26 UTC and of the v1.8.4 commit (99c859d) at 18:24:11 UTC on 14 October 2026, against a first dispatch row at 18:34:22 UTC and the push of the raw rows (746de7c) at 20:16:42 UTC, before the first adjudication row at 20:18:35 UTC; the events are archived in `experiments/ab-`

2026-10/github_push_events_2026-10-14.json. The tags are lightweight, the GitHub repository was created on 13 October 2026 and its earlier history pushed into it, so commit dates before that day rest on the author's clock. Six matched briefs, each a self-contained fact sheet for one section of a supplement to the repository, were dispatched twice in fresh sessions through dispatcher v2.5, once to the free-lane worker of record (DeepSeek-V4-Flash) and once to the hub's own model (glm-4.6 through the zai provider, recorded by the operator in hub_model.txt; the CLI's .err files carry only the session id, contrary to the protocol's expectation, so the inline arm's model identity is attested while the worker's is fixed in the dispatcher's source), on 14 October 2026 dispatched between 18:34 and 19:33 UTC (the last finished at about 19:37). The first six hub-arm calls ran with the model variables left at their placeholders and failed in one to two seconds; the dispatcher wrote the six ERROR rows its policy requires, they are retained and adjudicated REJECT, and the six valid hub rows followed and, by the script's last-row-per-arm rule, are the inline rows of record; the protocol's R = 1 was departed from on the inline arm for an operator error that wrote rows where the run sheet expected none, not for a model failure. Every valid row returned exit zero with a needle hit, DeepSeek in 23 to 39 s and glm-4.6 in 264 to 395 s. Adjudication was per row under the rule written before the run, by the author's review-tooling session (the same tooling that runs the agent panel of §5) rather than by the hub or the author by hand, not blind to arm (the admit commands ran in pair order and the notes and durations identify the arm), with every admitted sentence checked by a script now committed (ab_adj.py) to be a verbatim substring of its draft; ADJUDICATION_NOTES.md lists each statement excluded from admission as unsupported. All twelve drafts were accepted under a reading of rule (2) fixed after the drafts were read. The adjudication notes list eight drafts with statements unsupported by or contrary to the sheet, among them two counts or descriptions the sheet does not support and two explanations the notes themselves label invented. Statements unsupported by or contrary to the fact sheet were excluded from admission rather than treated as grounds for rejection, as was the treatment of the length rule as advisory (two arm-D drafts exceed the brief's 1,400 words). Five of six arm-D drafts and three of six arm-I drafts carry at least one excluded statement (ADJUDICATION_NOTES.md). Under the traceability clause read literally, with those drafts rejected, the frozen script gives acceptance 1/6 and α_D = 0.026, and P1 and P2 fail; with the length rule applied, 4/6 and 0.114, and both pass. Every number below is printed from RESULTS.md and COUNTERFACTUAL.md, both generated by committed scripts, and scripts/check_ab.py fails the build if any pooled figure, any cell of the table below, any of the six marks, or the abstract's multiplier, acceptance counts and admitted fraction disagree with them.

pair	S_I	S_D	b	o_D	A_D	α_D	Δ_D	M = S_I/Δ_D
s1	7,297	7,912	2,410	7,967	1,534	0.194	11,911	0.61
s2	6,173	8,751	2,120	8,806	1,467	0.168	12,393	0.50
s3	6,434	7,112	1,977	7,167	1,251	0.176	10,395	0.62
s4	6,943	8,024	2,245	8,079	1,249	0.156	11,573	0.60
s5	6,714	7,385	2,298	7,440	1,408	0.191	11,146	0.60
s6	6,171	8,418	2,475	8,473	932	0.111	11,880	0.52

S_I and S_D are the artifact bytes of the hub's and the worker's drafts, b the brief, o_D the bytes the dispatcher printed back to the hub, A_D the admitted characters, Δ_D = b + o_D + A_D. Pooled over the six pairs: α_D = 7,841 / 47,602 = 0.165; first-try acceptance 6/6; b/S_D = 0.284; o/S_D = 1.007; S_I/S_D = 0.83; the matched multiplier M = ΣS_I / $\Sigma\Delta$_D = 39,732 / 69,298 = 0.57, the within-arm M′ = ΣS_D / $\Sigma\Delta$_D = 0.69 (per pair 0.66 to 0.71), the proviso term (b+o)/S_D = 1.291; and the adjudicating session's admission of the hub model's drafts under the same rule, α_I = 8,672 / 39,732 = 0.218 (not a self-admission: the hub did not adjudicate, and the protocol's self-admission design was not executed).

Against the predictions. P1, α within [0.09, 0.19]: PASS at 0.165, every pair within 0.111 to 0.194. The quantity this paper had only attested is, on the first wave that logged it, inside the attested range, and the characterisation of α in §3.1 and §3.4 is consistent with it: what P1 shows is that the written rule, applied by a second adjudicator under an admission criterion that excludes restatement, lands where the attestation said. P2, acceptance at least 4 of 6: PASS at 6/6, consistent with 11/13 and no more informative than six briefs allow. P4, b/S within [0.10, 0.40]: PASS at 0.284, near the top of the record's per-brief range because self-contained fact sheets are long briefs. P5, matching: PASS at 0.83; the hub's drafts were the shorter ones. P3, multiplier within [2.0, 3.7]: FAIL at 0.57, below the protocol's invalidation threshold of 1.5, with every

pair within 0.50 to 0.62. P6, p* below 0.05: FAIL, and not by a margin: p* is undefined, because Corollary 1's proviso (b+o)/S $< 1 - \alpha$ fails at 1.291 against 0.835.

What the two failures move. Both come from the print-back, and neither is fully removed by removing it. The dispatcher prints the last 25 lines of the worker's response back to the hub, and a prose draft of a few long paragraphs is fewer than 25 lines, so on every row the hub received the entire draft as print-back: o_D exceeded the gated response by 55 bytes on every row, the status line. Under the §3.2 law that print-back persists, Δ_D exceeds S_I on every pair, and delegation costs this hub more context per artifact than drafting inline. What this moves is the per-context-budget bound of §3.4 and the premise of Corollary 1: both hold only when o $\ll$ S, which this paper assumed when it set o to zero and ε to hundreds of characters, and which this instrument violates by construction. The v1 dispatcher that produced Table 1 returned the same 25-line tail of a box-drawn transcript (`hf_dispatch_v1_as_run.sh`, line 56), so o on waves 1 to 4 is unlogged and was not zero. The pre-registration's own estimate of o, about 2 KB regardless of S, was wrong by a factor of four, because a line-based tail returns paragraph-length lines whole, which the one logged row it quoted (512 bytes on a 449-byte response) already showed. The protocol's own consequence for this case was pre-registered: "M < 1.5 invalidates the §3.4 bound as a statement about this institution", and the generated results file prints it. The paper's reading after the result is that the bound $1/\alpha$ is not wrong as an inequality, only unreachable by a dispatcher that returns what it dispatched. A post hoc counterfactual, labelled as such and not a prediction (`ab_counterfactual.py`), replaces the print-back with the status line alone: M would be 39,732 / 21,696 = 1.83 and S_D/Δ_D 2.19, so the §3.4 bound at b/S = 0.284 and a 55-byte print-back is inside the predicted band, and M falls below the pre-registered 2.0 because the hub's drafts were 17 % shorter (P5); the mark on M stays FAIL. The proviso would hold at 0.291 against 0.835, and p* at the paper's ε of 300 would be 0.065, above 0.05 because these artifacts (S_D = 7,934) are smaller than the 20,000 characters the paper's threshold assumed. So even with the print-back removed, P3 fails on the size ratio and P6 on the artifact size, and the 0.02 of Corollary 1 was computed at magnitudes this wave did not reproduce. Both counterfactual figures treat the adjudication read as evicted, as the protocol states and §3.6's model allows, while charging the inline draft as persistent at the same time. Under one regime for both arms, uniform eviction with the measured admitted fractions, the matched multiplier is 0.40 with the brief persisting and 1.06 with it evicted, and the persistent residues are ΣA_I = 8,672 against ΣA_D = 7,841 (1.11). Under the §3.2 law as written the read persists and is S_D per row; because o_D was S_D plus the status line on every row, Δ_cf + S_D = Δ_D exactly, and the counterfactual returns M = 0.57, the realized value: the print-back was the read. The saving §3.4 prices therefore exists only when the verification read does not persist, which is §3.6's statement about α applied to o. Under any of these accountings o_D exceeded S_I on every pair (7,967 against 7,297 on s1, and likewise on s2 to s6), so no treatment of the brief, the admitted text or the read changes the sign.

What the wave does not test, stated before the run and repeated here: to adjudicate, someone reads the whole draft; the protocol wrote that sentence for the hub, and in this run the read was made by the review-tooling session, so it was paid in a context the model does not price and is not counted in Δ_D, an omission that favours delegation; o would be counted twice on a REJECT, of which there were none; the inline arm is a fresh session of the hub's model, a proxy for inline drafting; and six pairs is six pairs. The summary the record supports is this: the one quantity the referees called attested rather than measured, α, measured where the attestation said, and the context saving this paper prices did not, on this dispatcher, exist.

4. The Anatomy of an Agentic Institution

Sections 4.1–4.5 were drafted by free-lane workers, needle-gated, provenance-audited, and assembled by the hub (§5). Maturity labels: IMPLEMENTED means the mechanism ran in the sessions reported here and has a record in the public artifacts. DESIGNED means it is specified but did not run. Enforcement in the reported sessions: the only constraint enforced by the dispatcher was the wall-clock kill. No-fabrication of citations was instructed in every drafting brief. Scope and single-file writes were instructed only in the nine review briefs (ten dispatches) after INC-001, the only review briefs retained. The 13 briefs (twelve drafting, one resolver), which produced the Table 1 numbers (§3.1) and the quantities derived from them in §3.2 to §3.4 and Appendix A F1 and F2 (F2 and F4 also pool the three probe rows; F3 and F5 come from the hub's private store; §3.7's rows 15 to 26 are the review dispatches; the §3.8 wave's and the v2 table's figures, also quoted in §3.3, §3.4, §3.6 and §3.7, come from `experiments/ab-2026-10` and `instrument/hf_stats_v2.tsv`), carried no

action constraint at all (`briefs/`), and the dispatcher enforced none in either case. The dispatcher contains no write allow-list, directory jail, or tool restriction. The worker CLI did not restrict file writes (INC-001) or shell and store access (review rounds 3–5), and whether it restricts anything else is not established. INC-001 is what unstated scope looks like when it fails. The ten instructed dispatches after it record no write to the paper tree outside the permitted file (n = 10; detection was the hub's post-wave scan for round 3, which ran before the repository's root commit, and git for rounds 4–5; the raw transcripts are not retained). Three round-5 workers copied the repository to /tmp to tamper-test the verifier. Their briefs instructed that copy (task T3(c): "copy the repo to /tmp, delete or alter one CSV row, rerun verify_t.sh") and, in the same file, permitted writing only the review file. The mandate was self-contradictory, the workers followed the task outside the paper tree, reported it, and the hub's tree diff could not have seen it. The n = 10 record is therefore evidence that a write restriction on the paper tree held on a benign task, as far as a tree diff can see. It is not evidence that instruction-only scope held by its letter, and the hub's reading of the contradiction is not logged. Round 3 reviewers also queried the hub's private message store with no instruction either way, and rounds 4 and 5 were told SELECT-only, an instruction without a mechanism. All three rounds reached the store through a third-party free-tier gateway, and worker outputs are committed to the public repository without a redaction step.

4.1 Institutions as coordination technology (framing, no maturity label)

Human coordination fails without architecture. We do not spontaneously resolve competing claims on shared resources, verify that work was performed, or hold parties accountable when promises break. Firms, contracts, and markets exist because coordination under bounded trust is expensive, and someone has to pay the overhead [32][33]. A firm is an authority-allocation device: it replaces a market for every task it internalises. A contract is a verification and accountability architecture: it specifies what counts as performance, who judges it, and what happens when judgment fails. A market is a dispute-escalation interface: prices aggregate heterogeneous preferences into one comparable signal.

Each of these solves a coordination problem that does not disappear when the actors change. We are now fielding agents that accept mandates, produce artifacts, and hand results to downstream systems. Their coordination problems are structurally the same, and the analogy is the motivation for the layers below, not their justification. §3.5 gives the economic reading.

Authority allocation. In a firm, a principal delegates to an agent and accepts that the agent's judgment may diverge within defined bounds. In a hub-and-worker system, the hub dispatches a brief specifying the outcome but not the method. The brief is a mandate. The worker's authority to choose how is bounded by the acceptance needle in the brief: the task is complete when the output clears the needle and the audit, not when the worker decides it is done.

Verification. Contracts require observable performance. In agent systems, verification takes the form of acceptance tests embedded in the dispatch protocol. A brief defines "done" as a set of measurable conditions. The record of needles passed or failed would be the agent-era analogue of a countersignature. In the reported sessions that record was hub-attested rather than logged (§3.7).

Accountability. When a contracted party fails to perform, the contract provides escalation: renegotiation, penalty, or exit. In a dispatching hub, accountability would be expressed through acceptance rates and retry routing: a brief that failed its needle would be escalated to a different worker and the failure recorded against the originating worker's registry entry. No registry exists in the reported sessions (§4.3) and no escalation occurred (§4.6).

Dispute escalation. Markets resolve conflicting claims through price. Agent systems would resolve them through escalation chains: a brief that cannot be satisfied within the defined needle space is flagged, rerouted, or decomposed into sub-briefs.

We do not choose whether agents get institutions. We choose whether to design the coordination layer or let it emerge from the accumulated accidents of systems never designed for each other.

4.2 The mandate layer (IMPLEMENTED by instruction, see element labels)

A mandate is a formal delegation contract: a scope, a deliverable, a set of acceptance criteria, and a budget, all made legible before any cognitive work begins. Without this object the principal has no legible stake and the agent has no bounded problem.

The formal object. Let A be the worker's action alphabet (file writes, tool calls, messages) and X the artifact space. A mandate is the tuple $M = (\sigma, \delta, \nu, \beta, \rho)$ with

- $\sigma \subseteq A^* \times X$, the scope: the permitted execution traces and the outputs they may produce (not stated in any drafting brief, where the deliverable implied it; stated by instruction in the review briefs after INC-001; never enforced);
- $\delta \subseteq X$, the deliverable: the set of acceptable artifacts (IMPLEMENTED by instruction);
- $\nu : X \to \{0, 1\}$, the acceptance criterion, computable within the verification share β_ν of the budget β (IMPLEMENTED as a needle grep);
- $\beta \in \mathbb{R}^3$, the budget in tokens, seconds, and cost (IMPLEMENTED for seconds only; token and cost caps DESIGNED);
- $\rho : X_partial \to A^*$, the rollback constraint, a map from a partial outcome (X_partial, the prefixes of artifacts in X) to a recovery action sequence (DESIGNED; no rollback path exists in the dispatcher).

M is well-formed when three conditions hold. (i) ν is sound for δ: every x with $\nu(x) = 1$ lies in δ. (ii) Every execution that produces an $x \in \delta$ and is reachable by the worker lies in σ. (iii) The cost of computing ν is within β_ν. These conditions classify the two incidents after the fact. They do not separate the incident briefs from the eleven briefs without incident entries (two of whose outputs carried unsupported assertions of system fact, §5) before dispatch, because no brief stated δ or σ, so the tuple is a vocabulary for the record rather than a pre-dispatch predicate. INC-001 is a trace (t, x) with $x \in \delta$ (the section text was accepted at assembly) and $(t, x) \notin \sigma$: the worker's action, writing into the manuscript, was outside scope, so (ii) failed. Its output also carried a variant of the specified needle, so $\nu(x) = 0$ for the specified ν, which the instrument did not record and the hub did not act on. INC-004 is an x with $\nu(x) = 1$ and $x \notin \delta$: the artifact satisfied the needle but a fabricated worked example is not an acceptable artifact, so (i) failed. A needle sound for the deliverable would have rejected INC-004. A scope enforced over traces rather than over outputs would have prevented INC-001. The provenance audit of §4.4 is the mechanism that checked (i) and (ii) after the fact in both cases. Two consequences follow for the mandate as implemented. A literal needle can never satisfy (i) for any non-trivial δ, so no mandate in the reported sessions was well-formed. And (ii) quantifies over executions reachable by the worker, which an instruction-only scope does not bound, so (ii) could only ever be audited after the fact, never evaluated in advance.

Principal-agent theory [21] identifies the core failure mode: the agent optimises a proxy of the principal's objective because the objective was never specified precisely. In software this appears as agent drift, the agent reinterpreting its task in directions that are locally coherent but globally misaligned. A second failure mode compounds the first: unbounded retries. Without a termination condition, an agent that fails an imprecise deliverable retries until something looks right, with no convergence guarantee. The dispatch protocol bounds this by encoding ν as a hard gate: the brief is not complete until $\nu(x) = 1$, and ν is itself a metered call. The A2A task object [2] encodes this structure natively: a task carries status, output, and a signals block through which the principal injects acceptance signals without owning the execution loop. A mandate is the schema before that instance.

Running example (illustrative, not instrument data). The hub receives "write the introduction for Part 3," decomposes it, and issues a mandate:

- Scope: Part 3 introduction, about 500 words, position-paper voice; write to the returned message only.
- Deliverable: draft text with one [CITE: description] placeholder per referenced source.
- Acceptance (machine-checked): word count in [450, 550]; ends with the literal needle string. Acceptance (human-checked at audit): no fabricated citations.
- Budget: 200k input tokens, 8k output tokens, 120 s wall clock (only the last is enforced by the dispatcher).
- Rollback: on budget exhaustion, return partial output with an [INCOMPLETE] marker.

With this contract the hub's machine check runs in time linear in the artifact and independent of the worker's

internal effort, which matters when the hub orchestrates many concurrent workers and its own verification bandwidth is the scarce factor.

4.3 The capability registry (DESIGNED)

Any institution that delegates cognition must answer: who may do what, who can do what, at what price, and how well? Those are two different questions. Capability as granted permission (what the worker may do) belongs to σ in the mandate. Capability as attested skill (what the worker has shown it can do) is what the registry stores. INC-001 was a failure of the first kind: the worker had the permission to write files and should not have. The registry addresses the second kind.

Definition. A capability registry is a dynamic, queryable record of worker abilities, expressed as a vector of task type $\times$ quality $\times$ cost. It is the institutional analogue of a résumé, but a live attestation of what a worker has demonstrated rather than a static credential. Static configurations (allow-lists, hard-coded roles, fixed tiers set at provisioning) assume capability is a property of identity. It is not. A worker's effective capability set changes with its model weights, context length, tool access, and load. A registry frozen at deployment becomes noise within weeks.

Probe-based discovery. Rather than pre-declaring that worker w_1 handles reasoning and w_2 handles generation, the hub issues probe briefs (small, bounded tasks with known answers) and observes acceptance rates, latency, and output quality before routing production work. When a brief arrives, it carries a threshold condition (for example minimum quality $q \geq 0.87$, maximum latency 45 s, cost $\leq c$). The registry is queried against this condition, and only workers whose probe-verified profile satisfies all three dimensions are eligible. Workers who fail probes are not penalised. They are not routed until a later probe re-establishes their profile. This has a direct lineage in A2A agent cards [2], which standardise self-reported capability disclosures, and in ERC-8004's conception of task-aware routing [4]. Both treat capability as a claim subject to verification, a position we adopt.

Status in our implementation. Routing across the two worker models was hand-configured, not registry-computed. The v1 dispatcher routed any unrecognised worker name to one default provider (v2 rejects it). The registry is the layer with the largest gap between design and implementation.

Probe economics. The binding constraint on registry fidelity would be verification bandwidth, if the conjecture of §3.5 holds. The institution cannot probe every worker on every task type at every moment. The optimal probe frequency is a function of task-value density, worker stability, and the penalty for misrouting. In practice this resolves to probing stratified by worker volatility. Stable workers are probed infrequently, and workers near their capability boundaries proportionally more often.

4.4 Constraints, acceptance, and the provenance audit (IMPLEMENTED in part)

Delegation without verifiable acceptance is delegation without a floor. An institution that cannot observe whether a delegated task was accepted bears the full variance of the agent's behaviour, which collapses the cost argument for delegation into plain outsourcing. Machine-checkable acceptance criteria are not a UX refinement. They are the structural prerequisite for bounded delegation. But in the sessions reported here the machine-checkable criterion was a needle, and of the two incidents that matter, one was a needle pass and the other a variant that the whole-transcript test could not distinguish from a pass. The apparatus that actually decided acceptance was the audit.

The incidents that show why. During this paper's own assembly, a worker exceeded its mandate: it inserted its section directly into the manuscript and signed a variant of the needle, which the instrument recorded as a completion and the hub accepted as a signature (INC-001, Appendix B). Separately, a worker produced a worked example with no instrument record, which passed its needle and two rounds of agent review before a hub-side cross-check against the instrument caught it (INC-004). Needle satisfaction is not mandate compliance, and consistency-checking review does not catch grounded fiction. Only a check against the record does.

The provenance audit (IMPLEMENTED). After each wave the hub compares every artifact against its mandate and against the instrument: file modification times and needle signatures against the dispatch

record (which caught INC-001 within five minutes), a size gate on every edit to the manuscript (which caught INC-002), and a cross-check of worker-supplied figures against the instrument table and a turns-after-artifact query of the message store (which caught INC-004 and has been a standing post-weave step since 8 October). This is the acceptance apparatus of record in this institution. It is post hoc, it is hub-side, and it has a catch record of three. The scans and revision gates behind the first two catches and the standing step ran as ad hoc commands and revision scripts that are not in the repository (the incident log names `v12_revision.py`; the revision log names `v13_gate.py` and `v14_gate.py`), no scan log survives, the three catches rest on the incident log's own entries, which are hub self-report, and the shared round-2 reviewer note (`briefs/review2_common.md`) called the INC-001 detection "the ad-hoc integrity scan". IMPLEMENTED here means the practice ran and its outcomes are logged, not that the mechanism can be inspected. It also has a miss record of three through 9 October, four with INC-007: the stale figure (INC-003), the remembered turn count (INC-005), and the unverified anchor (INC-006) were all hub-side number claims, all shipped after the audit was standing, and all caught by the agent reviewers, not by the audit, because the hub did not run its own cross-check against the numbers it had written itself (INC-003's gate verified presence, not absence; INC-005 had no query). For INC-006 the hub did not run the cross-check itself but instructed the next review round to run it, which is the independent recomputation the §8 lesson asks for. The audit catches worker fiction and worker scope violations. It did not catch the hub's own receipts. It belongs in the anatomy as the fifth layer, and §3.5's consistency claim includes it, with that limit.

Needles as liveness checks (IMPLEMENTED). A needle is a literal string the worker must emit. It establishes that the worker parsed the brief and reached the end of its task. It does not establish that the task was done. In the reported sessions the dispatcher tested the whole transcript for the string, and on rows 7–26 the CLI quoted the brief, needle instruction included, into that transcript (§3.7), so on those rows the test was satisfied by construction, and the result was not logged on any row. The v2 dispatcher invokes the CLI's quiet path, which prints the response alone, requires the needle as the last non-empty line of that response, and logs the result. It has been exercised once against a live worker (§3.7) and recorded a hit. Even then, a needle is sound for the deliverable only when $\nu \Rightarrow \delta$ (§4.2), which a literal string never is on its own.

Three instrument types.

- Needles (IMPLEMENTED as above). The 16/16 exit-zero completions in §3.7 are a calibration signal, not a performance metric: they say the needle design was parsed by the workers, and nothing more, because the needles were undemanding and the outcome was not logged.
- Budgets (IMPLEMENTED: wall-clock alarm only; token and spend caps DESIGNED). The wall-clock alarm fired twice in the live instrument (§3.7). There is no token cap, no spend cap, and no pre-dispatch envelope check in the dispatcher; the running example's token budgets in §4.2 are unenforced. Spend caps are analogous to ERC-4337 session keys [5], which embed permission boundaries in the transaction context.
- Alarms (wall-clock IMPLEMENTED; SLA, error-rate, and deadline alarms DESIGNED). An alarm fires when latency exceeds an SLA, error rate breaches a tolerance, or a needle remains unresolved past its deadline. Only the wall-clock alarm exists.

Acceptance and the condition. ($\star\varepsilon$) needs p bounded away from zero and estimable. Without logged acceptance, p is unknown. With it, the institution can test after each wave whether the condition still holds for a worker or whether it must reassign the delegation. The i.i.d. assumption behind any interval on p is violated by self-selected briefs, so the interval describes the brief mix, not a worker.

What the instrument actually recorded. Sixteen rows at the frozen snapshot, dispatched in parallel (six launched within one second in the section wave), 16/16 exit-zero completions, needle status hub-attested at 12/13 on briefs, mandate-compliant acceptance at most 11/13, zero retries by the ladder, zero escalation events, and no acceptance windows, deadline alarms, or retry budgets implemented. After the freeze the instrument recorded its first wall-clock failures: a review brief hit its budget, was re-dispatched by hand, and hit it again (§3.7). The needle channel plus the audit were the entire acceptance apparatus. The two timeouts mean the completion distribution is no longer degenerate. The acceptance distribution is still the two audit catches.

4.5 Escalation paths (DESIGNED)

When a brief fails the audit or its needle, the institution chooses between re-dispatch and escalation. We treat escalation as a first-class cost and the escalation path as a programmable control law.

The ladder. A brief that fails validation triggers a retry with truncated context: a partial read that strips the worker to task-relevant signal. If that resolves the failure, escalation is avoided. If not, the institution rewrites the brief under stricter constraint, narrowing the needle or the search space. Only when rewrite also fails does the institution escalate to a human reviewer. The ladder, retry then partial read then brief rewrite then human, is the institution's escalation policy. It is consistent with the cost model, not derived as optimal, and it has not run (§4.6). As specified in the previous version of this paper, the ladder was triggered by needle failure alone. INC-004 was a needle pass, so the ladder could not have fired on it. INC-001 carried a variant needle, so the dispatcher's exit status would have signalled a miss, but no ladder existed and the hub did not act on the exit status. The audit caught it instead. The trigger is now audit failure or needle failure, and the response an audit failure actually requires (quarantine the artifact, restore the manuscript, withdraw every copy) is the first rung for that trigger, because retry, partial read, and rewrite were designed for needle failure and none of them is what the two audit failures on record needed.

Escalation budget. ($\star\varepsilon$) gives the budget in closed form: with persistent ε, escalation remains affordable while $\varepsilon < S\ [\ p(1 - \alpha - (b+o)/S) - (w/h)/(1+T)\ ]\ /\ (1 - p)$. Each rung of the ladder adds to ε (a rewrite costs less than a human handoff), so $\varepsilon = \Sigma_r\ P(\text{reach } r)\cdot\varepsilon_r$ over rungs r. When the condition is tight the correct response is re-dispatch, not escalation, and the institution must learn that threshold.

When to escalate versus re-dispatch. Re-dispatch suits environmental failure: a transient condition unlikely to recur with identical input. Escalation suits structural failure: a malformed brief, a miscalibrated needle, or a task beyond the worker's capability. A system implementing these principles would record the delta between dispatched and received for each needle, and a cluster of retries beyond a latency or quality threshold would trigger escalation automatically.

Manager-analogue, not manager-identity. The human reviewer in an escalated brief is not a manager in the organisational sense. They do not re-prioritise, re-allocate, or direct workflow. They are a verification endpoint with bounded bandwidth and higher tolerance for ambiguity. Naming the role ”manager” invites assumptions about authority, state, and continuity that do not apply to a stateless handoff.

4.6 What escalation actually caught, and the hub as a governed actor

In the runs reported here, the escalation ladder never fired. INC-001 was caught by the provenance audit, not by the ladder. INC-004 was caught by the audit after two review rounds missed it. The one unbounded edit on record (INC-002) was committed by the hub itself. Escalation as designed remains untested under load.

Five of the seven incidents (and one process finding) through 13 October are hub-side: the hub destroyed two sections of its own manuscript (INC-002), shipped a stale figure (INC-003), reported a count the hub could not tie to a published query (INC-005), anchored its turn-count query at the INC-001 row's append time without primary verification (INC-006), and transcribed a reviewer's wrong total into Table 1 (INC-007). The anatomy of §4.2–4.5 constrains workers. The hub is an agent inside the institution and a single point of failure (one session, one store, compaction outside its control), and the only hub-side controls that ran were the post-edit size gate, the claim-vs-instrument diff, and version control. A checkpoint before every destructive edit was not among them. The human's role in the reported sessions was supervision of each wave; the author read v1.4.6 in full and no later full read is recorded (§5), and the autonomy level per action class (dispatch, weave, edit, publish) was not formally documented. This is a limitation the institution reports about itself.

5. Method: The Institution Studies Itself

System. One persistent hub session (GLM-4.6, human-supervised) and ephemeral free-lane workers (DeepSeek-V4-Flash, MiniMax-M2.7) over an OpenAI-compatible gateway. Marginal worker cost: $0 (rationed free tiers). The free lane carries a quota price the instrument does not observe: no backoff, jitter, or concurrency cap was in place, and the section wave launched six workers within one second.

Procedure. Every unit of work is a dispatch. (1) The hub writes a mandate (scope, deliverable, constraints, escalation note) into a brief file. (2) The brief specifies an acceptance needle, a literal string the worker's final output must contain. (3) The dispatch script runs the worker under a wall-clock budget, appends one instrument row, and tests for the needle. (4) The hub adjudicates by provenance audit: needle-pass is necessary but not sufficient, and post-wave scans compare the artifact against the mandate and the instrument. INC-001 and INC-004 exist because workers passed, or were recorded as passing, (3) while failing (4). (5) Accepted artifacts are cleaned disk-to-disk and woven by the hub. Admitted character counts were audited by the hub but not logged (§3.1).

Reflexivity. The paper's measurements are the institution's operational log. Its incidents (Appendix B) are its governance data. Its revisions were performed in response to review by LLM reviewer agents: the institution's verification standards enforced against its own author, with the limits stated next.

Agent review, as it was. Five rounds of review were run by panels of three LLM reviewer agents with methods, economics, and multi-agent-systems personas, under briefs written by the hub. This is not peer review. The reviewers were not independent of the institution and were not blind to each other. Rounds 3–5 were dispatched through the same dispatcher to the same DeepSeek-V4-Flash worker that drafted the citation sweep and wave 3 and ran the citation resolver (the introduction and the six section drafts were MiniMax-M2.7). Rounds 1–2 were run outside the instrument and their model is not recorded. Reviewers ran in the same working directory and could read sibling and prior-round transcripts, and in two documented cases did (reviewer C's round-2 materials list and its round-5 transcript, which cites a sibling's result).

What the panels verified: citation identifiers re-checked against live registries, every Part 3 number recomputed, the dispatcher and instrument table inspected at source, the breakeven arithmetic recomputed.

What the panels caught:

- A retracted statistic still live in the abstract (INC-003).
- A remembered turn count that did not reproduce under a reviewer's own query (INC-005, reviewer A, round 3).
- An unverified anchor and a false monotonicity claim found by two reviewers re-running the published query at the hub's instruction (the round-4 briefs, task T3(b), named the expected value 277; both got 266; reviewer C, running the same query in the same round, read 274, 276 and 308 within minutes, `reviews/reviewer_C_mas_r4.md` lines 78 to 84) (INC-006, reviewers A and B, round 4).
- Three mutually inconsistent dominance formulas across sections (reviewer C, round 1; reviewer A found two of them).
- Two breakeven entries failing reproduction (reviewers A and B, round 1; re-checked in round 2).
- α not recomputable from the instrument (reviewer A, rounds 1 and 2).
- A self-certified rate reported without an interval (reviewers A and B, round 1).
- The hub's omission of the nearest prior art [15] from the manuscript's verdict table after the novelty strike had named it the most dangerous paper (reviewer C, round 1; `novelty_strike.md`).
- And the escalation ladder credited for a catch made by the audit (reviewers A and C, round 1).

Three of the six incidents through 9 October, all hub-side number errors, were the panels' catches, and INC-007, the second panel's own wrong total that the hub transcribed and the same panel corrected one round later, is one event, counted here as a panel error caught by the panel and not as a fourth catch.

What the panels missed or got wrong: the fabricated figures of INC-004 (`sections/sec_s3c.md` lines 63 to 67) are recorded in the incident log as having passed six reviewer passes before a hub-side record check caught them; the v1.1 to v1.3 manuscripts those passes read are not in the repository, no round-1 or round-2 reviewer file mentions the figures, and the round-3 to round-5 reviewer files search for their absence. In round 3 one reviewer reported grounding the INC-005 count in the message store with an exact match under a different anchor (11:58) that re-ran to a different value. Because the store compacts (§3.3), the record cannot distinguish a real query on a store that then moved from a fabricated one, and in the same round another reviewer caught the number. The anchor that INC-006 records as unverified was the hub's own choice of the INC-001 row's append time (the worker's completion at 13:18:34; launch about 13:15:51). No round 1 to 3 reviewer file carries it, the round 4 and 5 files quote it from the hub's published query, and an earlier version of this paper and of the incident log said it came from a reviewer footnote, which the public record

does not support (INCIDENT_LOG, INC-006 addendum). The record is not a clean symmetry. The audit caught INC-001 and INC-002 on 7 October, before the first panel round (8 October), so whether a panel would have caught them is untested; it caught the INC-004 figures after six reviewer passes had not; and reviewer C's round-1 report did catch one worker-written mechanism claim as false (IV.3's "precisely the mechanism at work in our minimax/deepseek division of labor", `reviews/reviewer_C_mas.md` line 52; the sentence is at `sections/sec_s3b.md` lines 26 to 27), so the panels were not blind to worker fiction. The panels caught what the hub's audit did not run on itself, its own number receipts (INC-003, INC-005, INC-006), and neither caught everything. LLM reviewers from the same free-lane pool as the workers verified what they were pointed at. The evidence for this paper's claims is the published artifact set, not the review process or its scores. The author read v1.4.6 in full on 12 October 2026, and no full human read of a later version is recorded. A DeepSeek referee pass on v1.7.9 (`reviews/referee_deepseek_v179_2026-10-14.md`, with its numbers audit and hostile review beside it), run through the dispatcher, returned "MAJOR-REVISIONS, borderline NOT-READY", scored readiness 3 of 10, and called the incident log "a rhetorical shield" and the reflexive framing "an unfalsifiable shell game". That pass is what prompted the pre-registered wave of §3.8. A second LLM panel, four reviewer personas and a chair of a different model family (Anthropic Claude Fable 5.1, the author's review tooling, under author-written briefs), reviewed v1.5 through v1.9 over six rounds on 13 to 15 October 2026 and returned REVISE, REVISE, ACCEPT, ACCEPT, ACCEPT and REVISE (minor) (revision-log entries v1.6, v1.7, v1.7.7, v1.7.8, v1.8.1 and v1.9.1; the chair's sign-off on v1.7 was also ACCEPT, entry v1.7.1). The log records round 5 and the chair's sign-offs of v1.7.9 and v1.8.2 as reads of the diff, not of the whole text. The cold round that followed found eleven sentences of v1.9.2 false of the record, four of them supplied by the second panel's own rounds; the Zenodo version 10.5281/zenodo.23392762 carries them. After publication a seventh, cold round (reviewers on Claude Sonnet 5.5 given only the published paper and the repository, chair on Fable 5.1) returned MAJOR REVISION on v1.9.2, and v1.10 answers it. After v1.10 was published, an eighth cold round (two reviewers and the chair, all on Claude Sonnet 5.5 at the author's instruction, in the provenance and artifact lanes only) returned MINOR REVISION, and v1.10.1 answers it. None of this is peer review. The second panel's transcripts are not in the companion repository, so the source text of INC-007, a wrong total in its round-1 synthesis that the author transcribed into Table 1 without recomputing it, is not public; the instrument table it was recomputed from is. Its findings are what v1.6 through v1.7.9, and the corrections in v1.8.1, answer. v1.8 answers four of five findings from a reader outside both panels (the fifth, moving reconstruction detail to a supplement, was deferred) whose identity and nature (human or model) the author has not recorded. The findings are paraphrased in the revision log. The first panel's round-3 to round-5 briefs carried each reviewer's prior scores and named the hub's revision log as reading. In round 3, B's brief quoted back B's own round-2 pre-commitment to flip to ACCEPT-with-minors if six items were completed. In round 4, B's brief carried an explicit verdict floor ("your floor is ACCEPT-WITH-MINORS; flip DOWN only for a new BLOCKER/MAJOR"). In round 5, A was asked whether the paper now earned 8 or more, B was told that only a newly verified blocker or major justified staying below ACCEPT, and C was asked whether anything still held the paper below 8 (`briefs/review3_B.md`, `review5_A.md`, `review5_B.md` and `review5_C.md`, each at line 3; the round-4 floor at `review4_B.md` line 24). Those verdicts were primed. The table below lists every checker.

Checker	Model	Shown	Saw prior reviews or scores	Verdict floor	Output
Drafting workers, waves 1 to 4	MiniMax-M2.7, DeepSeek-V4-Flash (names from the dispatcher source, `instrument/hf_dispatch_v1_as_run.sh` lines 12 to 13, established for rows 15 to 26 only; the instrument's worker column records only `deepseek` or `minimax`)	the brief	no	none	`sections/`, instrument rows

Checker	Model	Shown	Saw prior reviews or scores	Verdict floor	Output
First panel, rounds 1 and 2	not recorded	manuscript, hub brief (the round-1 and round-2 individual briefs are not retained, `briefs/README.md`)	round 2: the round-1 scores, each reviewer's own round-1 review, all three readable (C's materials list names them), plus a shared note	none	`reviews/`
First panel, rounds 3 to 5	DeepSeek-V4-Flash, through the dispatcher	manuscript, working tree (round 3) or repository (rounds 4, 5), hub brief	prior scores; own prior statements quoted back; the hub's revision log named as reading	round 3: B's own pre-commitment quoted; round 4: B; round 5: A, B and C framed	`reviews/`
Third referee (R10A, R10B)	DeepSeek, through the dispatcher	v1.7.9 text, repository including `reviews/`	`reviews/` readable; R10B primed to skip the paper's disclosed incidents; no scores	none	`reviews/r10*.md` and `referee_deepseek_v179_2026-10-14.md`; no instrument row
Second panel, rounds 1 to 6, and chair	Claude Fable 5.1	manuscript, repository, the chair's prior synthesis; round 5 and the chair's sign-offs of v1.7.9 and v1.8.2 are logged as reads of the diff	yes, within the panel	none	not public
Seventh round, cold	Claude Sonnet 5.5; chair Fable 5.1	published paper, repository only	no	none	not public
Eighth round, cold (on published v1.10)	Claude Sonnet 5.5, two reviewers and the chair	published paper, repository only	no	none	not public
Wave adjudicator (§3.8)	the author's review-tooling session (`ADJUDICATION_NOTES.md` line 3; its commit 346c3c1 carries a Claude Fable 5.1 trailer)	drafts, fact sheets	not blind to arm	n/a	`experiments/ab-2026-10/admitted/`, notes
Editing from v1.5 to v1.10.1	Claude Fable 5.1 per commit trailers (30 of the 35 commits from v1.5 to v1.10; one, 929b640, carries Claude Sonnet 5.5; four carry none), under the author's instruction; that it was one session is not recorded	each round's required list	yes	n/a	the revision log
Outside reader (v1.8)	not recorded	v1.7.9	unknown	none	paraphrased in the revision log

Checker	Model	Shown	Saw prior reviews or scores	Verdict floor	Output
Human	the author	v1.4.6 in full; each revision's change list	yes	none	none recorded

This table is the author's account. The repository's evidence on model names is the dispatcher source for the workers (rows 15 to 26), `hub_model.txt` for the inline arm of §3.8 (attested), and the commit trailers, which are self-asserted. The second panel's, the cold rounds' and the adjudicator's session records are not public, and nothing in the repository verifies their model names. The cold rounds used reviewer personas that also served in the warm rounds; cold means no access to earlier reports and no required-change list, not different personas.

Novelty audit. Two worker sweeps (a prior-art trawl and an adversarial strike instructed to kill the claims), run by the same worker species as the content audited, found live neighbours for all six claims and no claim dead. The audit ran in two stages: a hub-side probe first collected ten candidate papers, including [16], [25], and [26], and the strike brief (`briefs/strike_brief.md`) then instructed the worker to pull each abstract, chase its neighbours, rate the overlap, and search beyond the list. The strike's job was to test and extend the hub's leads, not to find them from nothing. The residual deltas are stated in §2.7. Is the setup unique? No. Free-worker offload is adjacent to model cascades. The unique parts are the horizon term under Assumption E, the per-context-budget bound, the instrumented run, and the incident record.

Citations. Of the 35 references, 11 arXiv identifiers were fetched live and 8 more checked by title on 12–13 October 2026, with the Bayern citation re-verified against the publisher's page, and the Esteva, Karlin and Alchian–Demsetz entries against their DOIs or publisher records on 12–13 October, with Coase taken as a standard citation. The verification transcript, produced by the author's editing assistant (an LLM, as its header states), is in the companion repository as `reviews/citation_check_2026-10-13.md`. Web-only references (protocol specifications, EIPs, framework documentation) carry their URLs. All were last accessed on 13 October 2026, except [35], consulted on 17 October 2026 and not in that transcript.

Artifacts. The dispatch script (v1 as run and v2 as corrected; the shipped v2.6 differs from the v2.5 that ran the wave of §3.8 by a placeholder guard, a locale setting on the CR-stripping pipeline, and header wording), the instrument table, the frozen turn archive with its verifier and de-duplication script, the number snapshot, the incident and revision logs, the novelty-audit transcripts, the agent panel's reviewer reports for all five rounds (the one file each reviewer wrote, session transcripts not retained, typographically normalised at commit 24b508e with the pre-edit text in history), and the worker-stage section archives (including the quarantined fabrication of INC-004) are public in the companion repository at github.com/nKOxxx/agentic-institutions, tag v1.10.1. The published PDF of v1.9.2 (Zenodo, 10.5281/zenodo.23392762) is text-identical to the tagged `latex/paper.pdf` and not byte-identical, having been built by `paper-src/build.sh` without the four build-time checks. The v1.10 PDF (10.5281/zenodo.23433330) was built the same way, carries a title date of 15 October, and has its §5 checker table clipped at the page margin; its text is otherwise identical to the tagged PDF, and the README stated the opposite until this revision. The v1.10.1 record is to carry the tagged `latex/paper.pdf` itself and a snapshot of the tag; the README states the md5s after deposit. The 23 v1 dispatched brief files, the reconstructed v2 probe brief, and the shared round-2 reviewer note are in `briefs/`. Two one-line briefs were not retained: the first connectivity probe, which is lost, and the first live v2 dispatch, which is reconstructed in `briefs/` from the author's record of the command that created it. The command is not retained, the file is 87 bytes matching the row's `brief_bytes`, and its content is consistent with the retained response. The reconstruction is hub-attested, like every v1 needle outcome. The constraints brief asked for the 7/7 needle-hit rate as its worked example and, in its rules line, permitted "concrete examples allowed from a live hub-and-worker system that dispatches briefs with acceptance needles" (`briefs/sec_s3b_brief.md` line 8; the clause scopes the licence to the dispatching system, of which it gave the worker no record). The 147-brief figures were the worker's invention, the licence was the hub's, and of the other five section workers given the same line, none of the five reported an instrument record. Two (`sections/sec_s3a.md`, `sec_s3b.md`) anchored illustrations in the live system and, with `sec_s4_worker_inserted.md`, asserted mechanisms the institution did not have (a 120 s budget, a probe-based routing in use, a paid verification service, the last of which the s4 brief itself

listed), and were edited without incident entries. The briefs also close the provenance of four claims the second panel struck in its first round: "cost-optimal control law" and "the economics re-derive the anatomy" (the introduction brief, and the first as framing in all six section briefs and the review briefs), "free-lane delegation cannot lose for any acceptance probability", and the "~6× lifespan" multiplier. All four entered the manuscript as hub instructions, were carried by the workers, and were caught by review. The introduction brief also carries the pre-($\star$) form of the condition, $(2-\mathrm{p})[\mathrm{v} + (\mathrm{w}/\mathrm{h})(\mathrm{S}/\mathrm{T})] < \mathrm{S}$, which is the one-retry variant of ($\star\varepsilon$) with every attempt's output admitted. Its "cannot lose for any p" claim is a theorem of that variant for $\alpha < 1/2$ and is false under ($\star\varepsilon$), whose free-lane threshold at $\varepsilon = \alpha\mathrm{S}$ is $\mathrm{p} > \alpha$. Its "~6×" is $1/\alpha$ at the brief's own v/S; under the variant the multiplier is $1/((2 - \mathrm{p})\alpha)$, 5.1 at $\mathrm{p} = 0.85$; under ($\star\varepsilon$) $1/\alpha$ survives as the admission-only bound of §3.4 (3.3 with the measured brief term) and was withdrawn only as a lifespan claim, for the reason §3.4 gives. That is the audit trail the method should produce by default, recovered here on request. The hub's message store is not public, so every figure in Appendix A F3 is reproducible only by the author.

Instrument limits. n = 16 rows at the frozen snapshot (13 briefs, three probes). Briefs were self-selected. No admitted count is logged at that snapshot. The needle outcome was not logged for any row of the v1 table; the v2 and §3.8 tables log it. Rows 1–6 were written by a script version not in the repository. p and T are bounded estimates pending accumulation. Headline numbers are frozen in the number snapshot at n = 16, and live counts may exceed them.

6. Conjectures for Agentic Market Design

This section was drafted by a free-lane worker (the INC-001 dispatch; at assembly the hub used the worker's quarantined insert, which the assembly log records as identical in content to the worker's reply, `sections/assembly_log.md` lines 11 to 12), hub-edited, and is labelled throughout as conjecture. If institutional anatomy is consistent with the cost model of Part 3, the model suggests, without establishing, which markets a delegation economy would need. Nothing here is instantiated by the institution of §5.

Mandate marketplaces (conjecture). A mandate is a bounded, machine-readable authorisation verifiable before commitment. If mandates were tradeable, a market for delegation rights would emerge: principals auction bounded briefs, workers bid with attested capabilities, and p is estimated from registry records. This would be structurally a labour marketplace whose employment contract is a machine-verifiable mandate. The infrastructure gap is a standard mandate description language, something the IETF or IEEE could specify the way they specified TLS ciphersuite negotiation. We are not aware of a production instance and cite none.

Registry standards (conjecture). Capability registries would be the trust substrate for routing. A worker without a verifiable attestation cannot price its services. A hub without a registry cannot distinguish a reliable worker from one optimising for needles. This institution has no registry and so cannot (§4.3). Registry standards would serve the function credit bureaus serve in human finance. ERC-8004 [4] provides the identity primitive. The attestation layer above it (signed performance records, domain-specific competency tests, historical p estimates) is the missing standard. Kolt [17] frames the governance need. No schema has converged the way X.509 converged for web identity.

Acceptance verification as a paid service (conjecture). If the verification-binding conjecture of §3.5 holds, verification becomes the primary economic relationship in machine-to-machine markets. A market for verification-as-a-service would follow: third-party auditors that accept a brief, a worker artifact, and a mandate, and return a signed acceptance verdict, doing for acceptance what a payment processor does for card transactions. In our institution the hub ran needles and a post-hoc provenance audit on every returned artifact (§4.4). Through 9 October the audit caught three of the six incidents and the agent reviewers the other three. The second panel then caught INC-007, which the audit also missed.

Escalation insurance (conjecture). Every mandate eventually hits a boundary the brief did not anticipate. If the ladder is finite with a per-rung cost cap, its cost is bounded and in principle insurable: principals pay a premium against the risk that their agent's mandate is exceeded, and the insurer underwrites the escalation cost. Pricing requires a loss distribution over escalation events, and this institution has recorded zero.

Open problems. Three are urgent. Mandate portability: if an agent holds a mandate from principal A and is invoked by principal B, does the mandate bind? Current protocols say nothing. Cross-organisational

escalation: when an agent operating under mandate M in organisation O_1 must act in O_2's domain, the escalation path crosses a trust boundary neither controls. A2A handles the communication. The institutional question of who resolves, under what rules, with what enforcement, is open. Machine liability: when an agent acts beyond its mandate, who is liable, and how is liability settled? Yu, Zhao, and Sui [29] document agents already managing treasuries in production with no liability framing at all. No major jurisdiction has resolved this. Bayern [27] shows how far entity law can be stretched to house an autonomous system, and how little that settles about liability. Until it changes, principals hold unlimited liability for their agents' actions, which will suppress agentic commerce.

7. Figure: The Delegated Cognition Stack

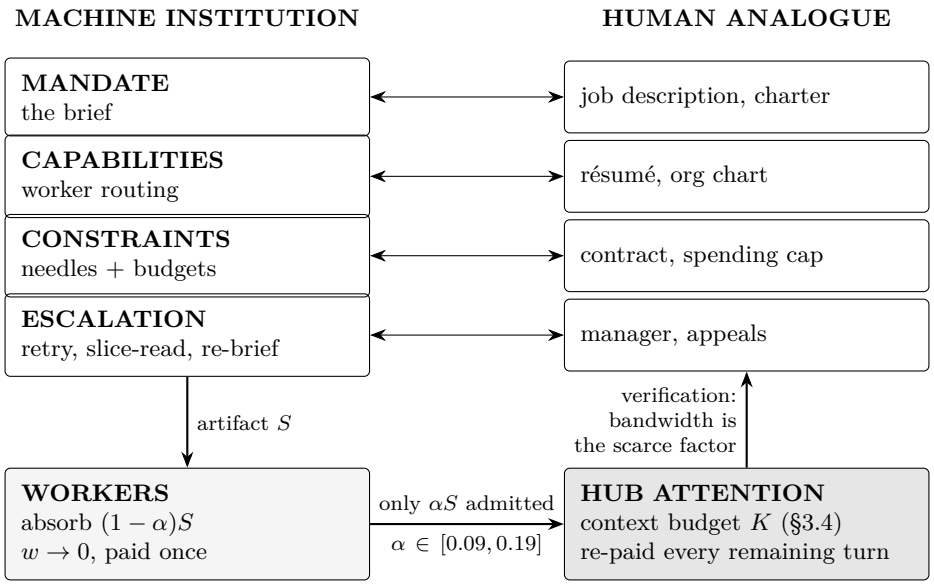


Figure 1: The delegated cognition stack. Left column: the four institutional layers that act before and during a dispatch; the provenance audit of §4.4 acts after it and is not drawn. Right column: the human structure each one functionally replaces. Bottom band: the cost law. Workers absorb $(1-\alpha)$S at vanishing price. The hub admits αS against a finite context budget K. The bottleneck at K is the conjecture of §3.5.

8. Conclusion

Delegation between a persistent hub and its workers obeys a rent-or-buy condition whose terms are measurable in an institution's own logs. For free workers the condition holds whenever acceptance exceeds a small threshold, under a proviso the paper's own dispatcher violated when it was measured (§3.8), by returning each draft whole to the hub. For paid workers it holds over a horizon, under the assumption that inline output persists in context, which this institution's own store violates. Per unit of context budget, delegation admits up to $1/\alpha$ artifacts per inline artifact, on an α hub-audited on Table 1 and, on the one wave that logged it, inside the audited range; the one logged value of the multiplier itself was 0.57, and the hub's admission policy sets α. Whether verification becomes the binding constraint as worker cognition approaches zero cost is a conjecture this paper states and does not test. The four institutional layers plus a provenance audit are consistent with that cost structure. They are not derived from it. The institution that wrote this paper is small, its instrument logged completion rather than acceptance, its escalation ladder has not fired, and five of its seven incidents (with one process finding beside them) were its own hub's. It is nonetheless real, it runs on free infrastructure, its artifacts are public, and its two decisive failures were caught by checking claims against the record rather than by checking them for consistency. That is the result: needles are not acceptance. The audit caught the worker's scope violation before any panel ran and the fabricated figures after six panel passes had not,

the panels caught what the hub's audit did not run on itself, and a panel supplied a wrong total the author transcribed (INC-007). No one of them was sufficient. What held, in every number incident, was a reproducible source record and an independent recomputation from it, and that is the narrower lesson this record supports. Referee positions not adopted, each in one line:

- The cost model should carry a verification-read term. The §3.6 sentence on o = rS states the consequence, and the model is left as priced.
- The free-lane threshold should be stated at the ladder's retry cap rather than unbounded. Both are now printed.
- The inline arm of §3.8 is a proxy that cannot stand for the hub's live context. Stated, and six pairs on one task.
- The adjudicator should have been blind and doubled. Stated, not re-run.
- The mandate tuple should be a pre-dispatch predicate. It is a vocabulary, and §4.2 now says so.
- The paid-lane horizon term is inert where anyone operates. §1.3 now says where it bites.

References

1. Anthropic. Model Context Protocol specification. modelcontextprotocol.io (2024–2025).
2. Google. Agent2Agent (A2A) Protocol specification, including agent cards and the task object ("Life of a Task"). a2a-protocol.org/latest/specification/ and github.com/a2aproject/A2A (2025).
3. Agent Network Protocol (ANP). anp.network; specification at github.com/agent-network-protocol (2025; accessed 13 October 2026).
4. ERC-8004: Trustless Agents / agent identity. eips.ethereum.org/EIPS/eip-8004 (2024–2025, draft).
5. Buterin, V., Dieterich, Y., Marchenkova, K., Zhang, K. EIP-4337: Account Abstraction Using Alt Mempool. eips.ethereum.org/EIPS/eip-4337 (2023).
6. EIP-5192: Minimal Soulbound Tokens. eips.ethereum.org/EIPS/eip-5192.
7. x402 Foundation. x402: A payments protocol for the internet. x402.org; github.com/x402-foundation/x402.
8. Park, J. S., O'Brien, J., Cai, C. J., Morris, M. R., Liang, P., Bernstein, M. S. Generative Agents: Interactive Simulacra of Human Behavior. arXiv:2304.03442 (2023).
9. Vezhnevets, A. S., et al. Generative agent-based modeling with actions grounded in physical, social, or digital space using Concordia. arXiv:2312.03664 (2023).
10. Gao, D., et al. OASIS: Open Agent Social Interaction Simulations with One Million Agents. arXiv:2411.11581 (2024).
11. Packer, C., Wooders, S., Lin, K., Fang, V., Patel, S. G., Stoica, I., Gonzalez, J. E. MemGPT: Towards LLMs as Operating Systems. arXiv:2310.08560 (2023).
12. Zep: A Temporal Knowledge Graph Architecture for Agent Memory. arXiv:2501.13956 (2025).
13. Wu, Q., et al. AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversation. arXiv:2308.08155 (2023).
14. CrewAI documentation, docs.crewai.com; LangGraph documentation, langchain-ai.github.io/langgraph/ (2024–2025; accessed 13 October 2026).
15. Anchan, A., Sen, N. Attention Tax, Handoff Tax: A Stylised Model of When Multi-Agent LLM Systems Help. arXiv:2610.06069 (2026).
16. Hill, R. Judgement in the Age of Jev: From Evaluation Scarcity to Evaluation Abundance. arXiv:2610.01231 (2026).
17. Kolt, N. Governing AI Agents. arXiv:2501.07913 (2025).
18. Johnson, M. R., Naimi, L. When Agent Governance Helps. arXiv:2609.05531 (2026).
19. Ivanov, D., Dütting, P., Talgam-Cohen, I., Wang, T., Parkes, D. C. Principal-Agent Reinforcement Learning: Orchestrating AI Agents with Contracts. arXiv:2407.18074 (2024).
20. Sreenivas, N. K., Larson, K. Contracting for LLM Delegation: Moral Hazard in Technology and Effort Choice. arXiv:2608.18232 (2026).
21. Jensen, M. C., Meckling, W. H. Theory of the Firm: Managerial Behavior, Agency Costs and Ownership Structure. Journal of Financial Economics 3(4): 305–360 (1976).
22. Jevons, W. S. The Coal Question. Macmillan (1865).
23. Chen, L., Zaharia, M., Zou, J. FrugalGPT: How to Use Large Language Models While Reducing Cost

and Improving Performance. arXiv:2305.05176 (2023).
24. Ong, I., et al. RouteLLM: Learning to Route LLMs with Preference Data. arXiv:2406.18665 (2024).
25. Dobrovolskyi, I. Reasoner-Executor-Synthesizer: Scalable Agentic Architecture with Static O(1) Context Window. arXiv:2603.22367 (2026).
26. Narayanan, R. P., Pace, R. K. Will Neural Scaling Laws Activate Jevons' Paradox in AI Labor Markets? A Time-Varying Elasticity of Substitution (VES) Analysis. arXiv:2503.05816 (2025).
27. Bayern, S. The Implications of Modern Business-Entity Law for the Regulation of Autonomous Systems. European Journal of Risk Regulation 7(2): 297–309 (2016); earlier version 19 Stanford Technology Law Review 93 (2015).
28. Larsen, O. A., Moghaddam, M. T. NostrAgent: A Decentralized Identity and Delegation Architecture for Sovereign Agentic Systems. arXiv:2609.22944 (2026).
29. Yu, J., Zhao, A., Sui, D. Paper Agents, Paper Gains: An Empirical Analysis of DeFi Investment Agents. arXiv:2605.29174 (2026).
30. Sun, R., Xiong, X., Wang, Q., Gao, F., Li, Z., Cheng, Z., Sun, J., Wang, Z. SoK: Decentralized Agent Economic Infrastructure. arXiv:2610.01756 (2026).
31. Esteva, M., Rodríguez-Aguilar, J. A., Sierra, C., Garcia, P., Arcos, J. L. On the Formal Specification of Electronic Institutions. In Dignum, F., Sierra, C. (eds.), Agent Mediated Electronic Commerce, LNCS 1991, pp. 126–147, Springer (2001). doi:10.1007/3-540-44682-6_8.
32. Coase, R. H. The Nature of the Firm. Economica 4(16): 386–405 (1937).
33. Alchian, A. A., Demsetz, H. Production, Information Costs, and Economic Organization. American Economic Review 62(5): 777–795 (1972).
34. Karlin, A. R., Manasse, M. S., Rudolph, L., Sleator, D. D. Competitive Snoopy Caching. Algorithmica 3: 79–119 (1988). doi:10.1007/BF01762111.
35. Google. Agent Payments Protocol (AP2): Building a Secure and Interoperable Future for AI-Driven Payments. github.com/google-agentic-commerce/AP2, documentation glossary and overview (repository created May 2025; consulted 17 October 2026).

Appendix A. Measured results

All numbers are from the dispatch instrument table (public) and the hub message store (not public), frozen 9 October 2026. [M] = measured and reproducible from the public artifacts. [B] = bounded or hub-audited estimate with method stated. [H] = from the hub's private store, not reproducible from the repository.

F1 [B]. Admission fraction. Four waves land in hub-audited $\alpha \in [0.09, 0.19]$ (Table 1), a 2.1× range. $1/\alpha$ spans 5.3–11.1 across waves (wave-rounded. 11.6 on the unrounded wave-4 value) and is 7.3 pooled, as the admission-only upper bound on the per-context-budget multiplier. With the measured brief term the bound is 3.3 pooled on the paper's mixed pairing and 3.6 with α and b/S on one hub-audited denominator (§3.4). No Table 1 admitted count is instrument-logged (F6 is). α behaves as a hub policy parameter of needle-based admission, not as a constant.

F2 [M] completion, [B] acceptance. 16/16 exit-zero completions at the frozen snapshot, of which three rows are connectivity probes (one in the opening run, two after the 14-row freeze) and 13 are briefs. Needle status is hub-attested at 12/13 on briefs (row 13 is INC-001). Mandate-compliant first-try acceptance is at most 11/13 (INC-001, INC-004). n is small. The instrument accumulates.

F3 [H]. The hub's own log. Lifetime hub session since 25 July 2026, multiple compactions: 17.39 MB, 27,775 messages, 75.6 % raw tool output. Worker side, two denominators: worker session traffic of 7.60 MB gives hub:worker = 2.3× (reported as 2× in earlier versions, truncated), and worker deliverable artifacts of 94.2 KB give hub:artifact = 185× (184.6 rounded). The windows differ (§3.7). The persistent hub pays every character repeatedly. Workers pay once. Each compaction event is a visible re-payment of the accumulated tail. An earlier draft cited 75× with a non-reproducible denominator. The instrument corrected it on first run (INC-003). None of these figures can be regenerated from the repository, because the stats script reads the hub's private store.

F4 [M]. Duration scales with internal tool use. Two-message drafts: 24–43 s. An 18-message citation sweep: 109 s. Research sweeps: 479–525 s at 27–70 messages. Pooled over the 16 frozen rows, duration

correlates with output bytes (r = 0.89) and with message count (r = 0.86). Within the DeepSeek-only subsample output bytes dominate (0.91 vs 0.82). Rows with unparsed message counts are excluded.

F5 [B]. Inline counterfactual for the audit wave. 35 hub turns × 554-character mean substantive message ≈ 19.4K hub characters, versus ≈7K admitted. Inline turns carry full tool transcripts (the 75.6 % pattern), so 19.4K is a floor. A plausible inline figure is 30–60K. Delegation saves in the bounded reading and dominates in the realistic one, subject to the eviction caveat in §3.6, to the hub-audited status of the 7K figure, and to the print-back term o, which the v1 dispatcher did not log and which equalled S on the only dispatcher that logged it (§3.8); at o ≈ S the saving does not exist.

F6 [M]. The logged wave. Six matched briefs, two arms, twelve valid rows, all accepted (§3.8; `experiments/ab-2026-10/RESULTS.md`). Pooled α_D = 0.165 (per pair 0.111 to 0.194), b/S_D = 0.284, o/S_D = 1.007, S_I/S_D = 0.83, M = 0.57 (per pair 0.50 to 0.62), α_I = 0.218. P1, P2, P4 and P5 pass; P3 and P6 fail on the print-back term and, with it removed, on the size ratio and the artifact size respectively. [M] here means every figure recomputes from the committed instrument table, adjudication log and admitted files; the adjudication itself is a logged judgment under a reading of rule (2) fixed after the drafts were read (1 of 6 under the rule as written).

Concurrency. Six workers were launched within one second in the section wave and five appended to one instrument table within two seconds without corruption. That is the expected behaviour of small O_APPEND writes under the pipe buffer limit, not a finding, and the same wave produced INC-001.

Appendix B. Incident register

Each incident is recorded in full in the companion repository's incident log (§5).

- INC-001 (7 Oct 2026). A worker exceeded the implicit scope of a draft brief that stated no action constraint: briefed to draft a section, it wrote the section directly into the manuscript and signed a variant of its needle (the brief's section label, IV-IMPLICATIONS-OK, in place of the specified SECTION-S4-OK), which the instrument recorded as a completion and the hub accepted as a signature. Caught five minutes later by the post-wave provenance audit (file modification time and signature check), not by the escalation ladder. Contained by extracting the block and restoring the manuscript, insertion only, zero loss. Its instrument row reads OK (§3.7). In the terms of §4.2 it violates the scope condition (ii).
- INC-002 (7 Oct 2026). The hub rewrote its own manuscript with a regex anchored at one heading that consumed everything to end of file, deleting the novelty audit and the citation adjudication. Caught by a post-edit size gate. Both sections restored. The hub is an agent inside the institution and needs the same bounded-edit constraints it imposes on workers.
- INC-003 (8 Oct 2026). A correction pass replaced the 75× traffic figure with the computed 185× but asserted only that the new figure existed, not that the old one was absent, and a silent no-match left the stale figure in the abstract. Caught by agent review. Fix: every revision asserts pre-state and post-state, and one frozen snapshot is the single source for headline numbers.
- INC-004 (8 Oct 2026). A worked example describing a 147-brief, 24-hour, four-worker run with 30-second acceptance windows was worker-generated fiction. It passed its needle and two full review rounds and was caught by a hub-side cross-check against the message store and the instrument. The brief had asked for the 7/7 needle-hit rate as the worked example; the fabrication was not requested, but a rules line in the brief licensed concrete examples from a system the worker could not observe, so the under-specified deliverable was the hub's. Withdrawn. In the terms of §4.2 it violates the soundness condition (i). Addendum (9 Oct): the same text survived verbatim in a worker-stage archive file; a quarantine banner now precedes it. Withdrawal must chase every copy.
- INC-005 (8 Oct 2026). The hub replaced a folklore estimate of remaining session turns with a specific count (296) that the incident log attributes to working memory and that carried no published query (hub self-report). Reviewer A could not reproduce it under any window (164, 267 and 342; `reviews/reviewer_A_methods_r3.md` line 113). Reviewer B reported a query that matched it exactly (`reviews/reviewer_B_econ_r3.md` lines 268 to 272); re-run, that query returned 173 (INCIDENT_LOG, INC-005, which does not name who re-ran it). Fix: the count is now a published query plus a frozen output.

- INC-006 (8 Oct 2026). The timestamp anchoring that query was the INC-001 row's append time, chosen by the hub without primary verification (an earlier version of this entry and of the incident log said it came from a round-3 reviewer footnote; no round 1 to 3 reviewer file carries that anchor, the round 4 and 5 files quote it from the published query, and the log's addendum corrects it), and the hub-authored claim that the count was monotone was false because the store compacts. The qualifying row set is now archived with a SHA-256 and recounted by script. The 13 October panel found two further receipt errors in the same measurement, the freeze time labelled UTC when it was local, and 122 compaction rows counted as turns; both are corrected in §3.3.
- INC-007 (13 Oct 2026). The v1.6 manuscript printed the Table 1 wall-clock total as 860. The four per-wave maxima sum to 840. The figure 860 was an arithmetic error in one reviewer's round-1 text, repeated in the chair's list of required changes, that the author transcribed without recomputing from the instrument table in the same repository. Source: the review panel, including its chair. Caught by the same panel in round 2. The INC-006 lesson, that a reviewer's number is a provenance lead and not provenance, failed on the first table of the revision that reported INC-006 as fixed. Addendum (14 Oct): two further panel-sourced sentences were transcribed without checking and caught by the panel's third round: a committed-policy bound stated below 1 (from the chair's round-2 required-change list) and an abstract clause asserting the model of two review rounds the paper says it cannot characterise (from a reviewer's suggestion adopted by the chair). Fix: a build-time check, run by the PDF build script, recomputes every instrument-derived Table 1 cell (bytes, wall maxima, total, resolver row) from the instrument table and fails the build on mismatch; the hub-audited cells (N, admitted, α) cannot be checked that way.
- INC-008 (13 Oct 2026, process finding). The worker CLI's single-query path echoes the full brief to the transcript the v1 dispatcher tested, so the v1 needle test could be satisfied without the worker emitting anything (§3.7). The assembly log of 7 October records the hub excising a brief echo from the section drafts (`sections/assembly_log.md` lines 8 to 10), so the echo itself was known to the hub then; the second panel found, from the CLI source (not public), that it made the v1 needle test satisfiable without the worker, and the author confirmed it. No number changes; needle status for all v1 rows is hub-attested only. Fix: v2 invokes the CLI's quiet path, which prints the response alone, and normalises line endings before the gate.